

Hybrid Pro 20FT Modular Backwall Kit 37

HP-K-37

Hybrid Pro™ Modular Kit 37 is a bright, bold and beautiful 20ft display. It features four Blaze™ Light Boxes one on each end and one on each side of the center. Three panels incorporate MODify™ merchandising walls and shelving for product display and presentation. Each section has SEG push-fit fabric graphics for branding and messaging; graphics are extremely easy to swap and replace. This versatile single-sided display can be used for exhibits and for retail stores!



We are continually improving and modifying our product range and reserve the right to vary the specifications without prior notice. All dimensions and weights quoted are approximate and we accept no responsibility for variance. E&OE. See Graphic Templates for graphic bleed specifications

features and benefits:

- Silver aluminum extrusion frames
- 4 light boxes, one on each end & one on each side of the center panel
- 6 silver steel shelves and 6 silver base decks for merchandising
- 7 single-sided SEG dye-sublimated push-fit fabric graphics, 4 illuminated, 3 non
- Cases included: OCH2@ (4)
- Lifetime hardware warranty against manufacturer defects

dimensions:

Hardware

Assembled unit:

233.88" w x 94.50" h x 29.72" d
5,953mm(w) x 2400mm(h) x 756(d)

Approximate Weight:
452 lbs / 205 kg

Graphics

Refer to related graphic templates for more information Visit:

<https://www.theexhibitorshandbook.com/downloads/download-graphic-templates> or click here

Shipping

Packing case(s):
4 OCH2

Shipping dimensions:
OCH2:
(52" L x 29" H x 15" D)
1448mm(l) x 1449mm(h) x 838mm(d)

Approximate shipping weight:
571 lbs / 290 kg



This product may include the following materials for recycle: aluminum, select wood, fabric, cardboard, paper, steel, and plastics.

additional information:

Graphic material:



Dye-sublimation SEG push-fit fabric

2 person assembly recommended:



HP-K-37

SETUP INSTRUCTIONS

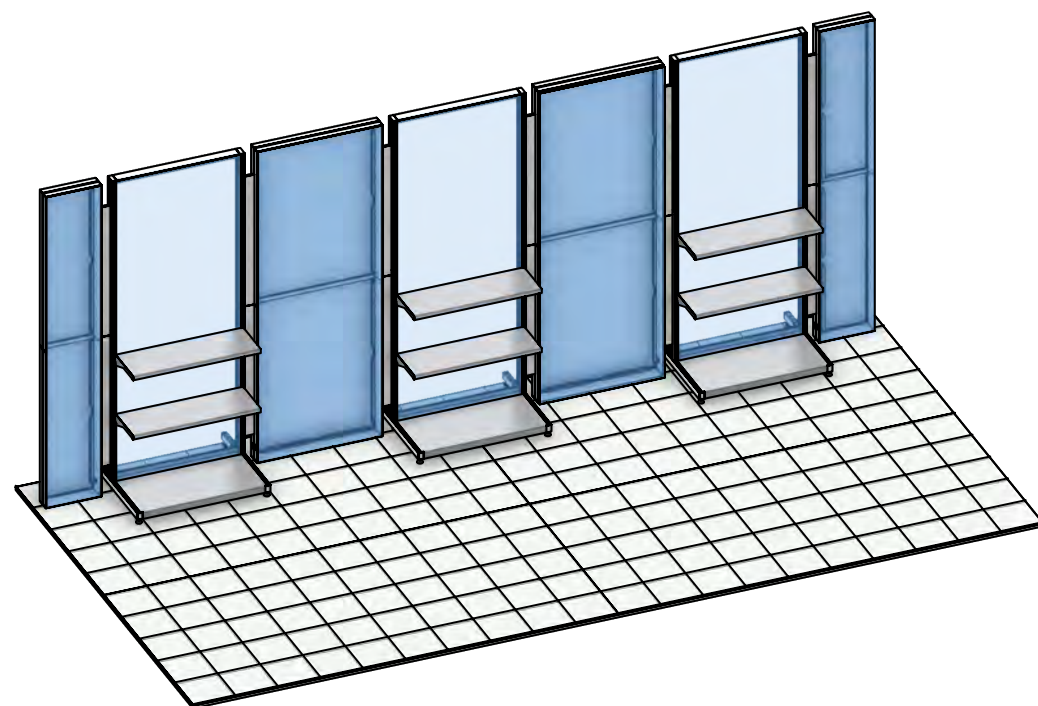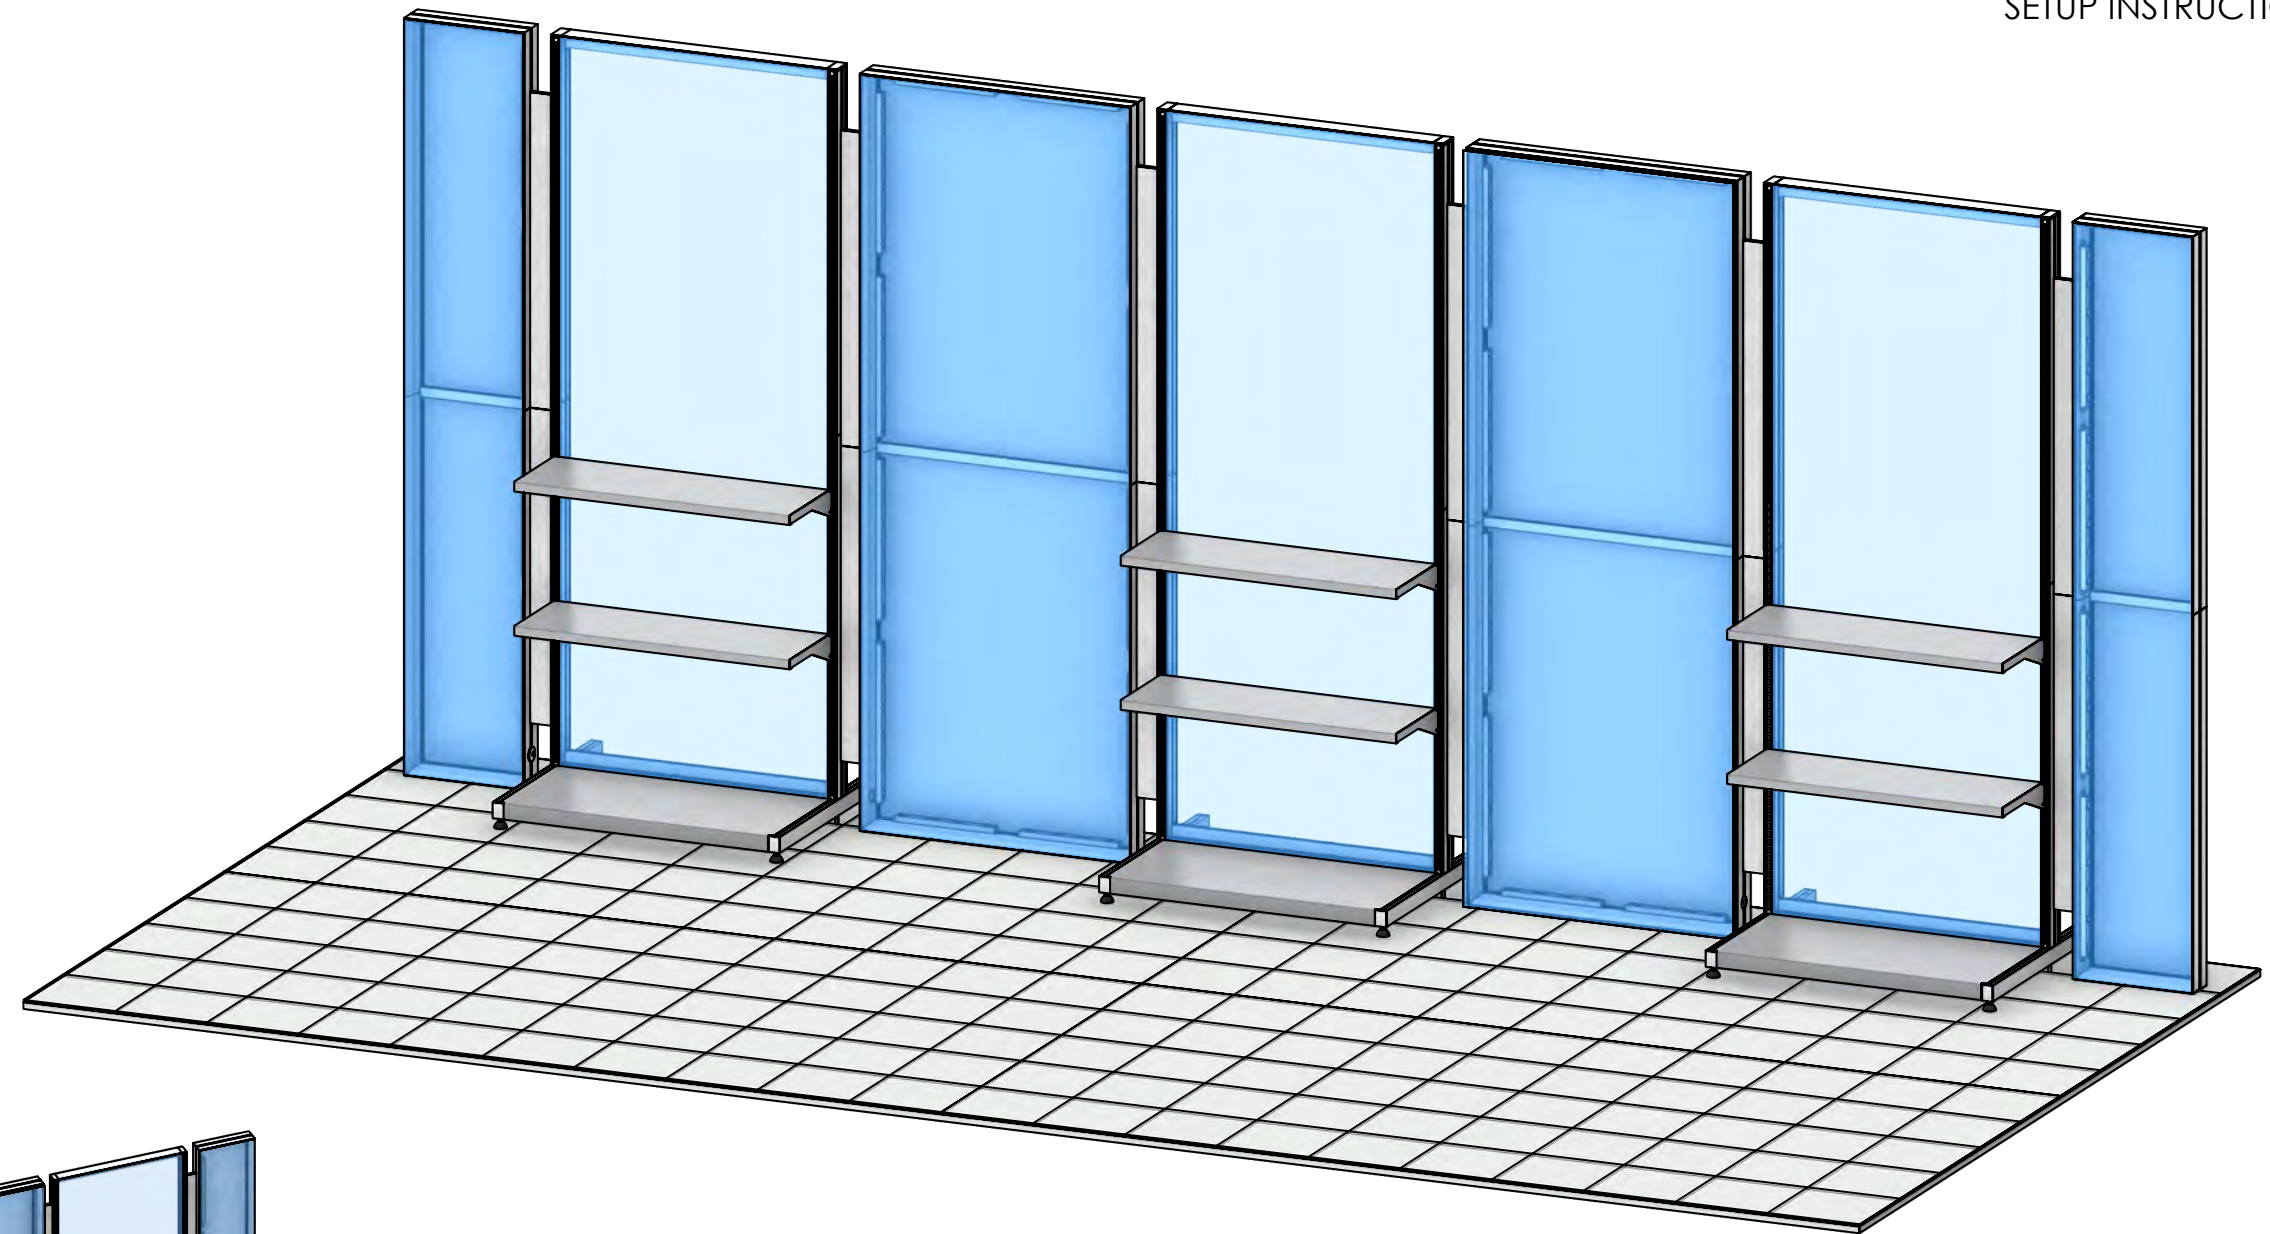

PROJECT BOM

| SETUP# | HARDWARE | # | DESCRIPTION |
|------------|--------------------|----|---|
| A1 | 101-354-01-01-PW | 2 | 354MM LENGTH OF PH1 POWDERCOATED EXTRUSION-WITH CAM LOCKS BOTH ENDS |
| A2 | 101-854-01-01-PW | 2 | 854MM LENGTH OF PH1 POWDERCOATED EXTRUSION-WITH CAM LOCKS BOTH ENDS |
| A3 | 102-1000-68 | 12 | 1000MM LENGTH OF PH2 EXTRUSION-WITH SIDE LOCKS BOTH SIDES |
| A4 | 348-400-32-32 | 4 | 400MM (15.75in) LENGTH OF 348 SILVER EXTRUSION-WITH MITRE CUT BOTH ENDS |
| A5 | 348-900-32-32 | 4 | 900MM (35.43in) LENGTH OF 348 SILVER EXTRUSION-WITH MITRE CUT BOTH ENDS |
| A6 | 348-1200-02-26-32 | 5 | 1200MM (47.24in) LENGTH OF 348 SILVER EXTRUSION-WITH MITRE CUT RIGHT END FOR CB10-IB2 LOCK HOLE LEFT END |
| A7 | 348-1200-02-32 | 1 | 1200MM (47.24in) LENGTH OF 348 SILVER EXTRUSION-WITH MITRE CUT LEFT END FOR CB10-IB2 LOCK HOLE RIGHT END |
| A11 | 348-1200-02-32-69 | 4 | 1200MM (47.24in) LENGTH OF 348 SILVER EXTRUSION-WITH MITRE CUT LEFT END FOR CB10-IB2 LOCK HOLE RIGHT END-WITH GROMMET HOLE 100MM FROM LEFT END. |
| A12 | 348-1200-32-26-02 | 6 | 1200MM (47.24in) LENGTH OF 348 SILVER EXTRUSION-WITH MITRE CUT LEFT END FOR CB10-IB2 LOCK HOLE RIGHT END |
| A8 | 824-750 | 6 | 750MM (29.53in) LENGTH OF 824 CORNER POST EXTRUSION -WITH THRU HOLE FOR 3/8 BOLT, 38.1MM FROM END |
| A9 | 830-1155 | 12 | 1155MM (45.47in) OF 830 SINGLE SIDED UPRIGHT OPEN EXTRUSION |
| 830-EC | 830-EC | 6 | 7MM SEG PLASTIC END CAP FOR 830 EXTRUSION |
| A10 | 835-883-01-01 | 6 | 883MM (34.76in) OF 835 DOUBLE SIDED SEG EXTRUSION -WITH CAM LOCKS BOTH ENDS |
| CB10 | CB10 | 16 | CB10 90 DEGREE CONNECTOR |
| IB2-O | IB2-O | 8 | JOINER BAR (OLD STYLE) |
| LED-EV-TH | LED-EV-THUMB-ORB | 64 | THUMB KNOB, ORBUS VERSION, FOR LED LIGHT BAR |
| LED-EV-W | LED-EV-WHT-6000-10 | 8 | LIGHT BAR (SEG), AC POWER, 6000K, 14" L |
| LED-EV-W | LED-EV-WHT-6000-19 | 24 | LIGHT BAR (SEG), AC POWER, 6000K, 21" L |
| MFY-DB-36 | MFY-DB-36-17 | 3 | 36"W X 17"D DROP IN BASE WITH 2" TOE KICK |
| MFY-EPIN | MFY-EPIN | 6 | MODify Tapered Extension Pin, 5/16-18 thread |
| MFY-SLF-36 | MFY-SLF-36-12 | 6 | 36"W X 12"D SHELF |
| SETUP# | GRAPHICS | # | DESCRIPTION |
| GR-A | HP-37-A-G | 1 | GRAPHIC (A) (19.63 w X 98.37 h total size) 15.63 w X 94.37 h finish size, Dye-sub print on Backlit Textile, single sided, sewn with silicone beading around perimeter & pull tab in bottom right corner |
| GR-B | HP-37-B-G | 1 | LINER (B) (19.63 w X 98.37 h total size) 15.63 w X 94.37 h finish size, Opaque Liner, sewn with FCE-2 silicone beading around perimeter & pull tab in bottom right corner |
| GR-C | HP-37-C-G | 1 | GRAPHIC (C) (39.26 w X 95.04 h total size) 35.26 w X 91.04 h finish size, Dye-sub print on Eclipse Blockout Stretch, single sided, sewn with FCE-2 silicone beading around perimeter & pull tab in bottom right corner (WITH 1/4" NOTCH LEFT & RIGHT BOTTOM HORIZONTAL SIDE CORNERS) |
| GR-D | HP-37-D-G | 1 | GRAPHIC (D) (39.31 w X 98.37 h total size) 35.31 w X 94.37 h finish size, Dye-sub print on Backlit Textile, single sided, sewn with silicone beading around perimeter & pull tab in bottom right corner |
| GR-E | HP-37-E-G | 1 | LINER (E) (39.31 w X 98.37 h total size) 35.31 w X 94.37 h finish size, Opaque Liner, sewn with FCE-2 silicone beading around perimeter & pull tab in bottom right corner |
| GR-F | HP-37-F-G | 1 | GRAPHIC (F) (39.26 w X 95.04 h total size) 35.26 w X 91.04 h finish size, Dye-sub print on Eclipse Blockout Stretch, single sided, sewn with FCE-2 silicone beading around perimeter & pull tab in bottom right corner (WITH 1/4" NOTCH LEFT & RIGHT BOTTOM HORIZONTAL SIDE CORNERS) |
| GR-G | HP-37-G-G | 1 | GRAPHIC (G) (39.31 w X 98.37 h total size) 35.31 w X 94.37 h finish size, Dye-sub print on Backlit Textile, single sided, sewn with silicone beading around perimeter & pull tab in bottom right corner |
| GR-H | HP-37-H-G | 1 | LINER (H) (39.31 w X 98.37 h total size) 35.31 w X 94.37 h finish size, Opaque Liner, sewn with FCE-2 silicone beading around perimeter & pull tab in bottom right corner |
| GR-I | HP-37-I-G | 1 | GRAPHIC (I) (39.26 w X 95.04 h total size) 35.26 w X 91.04 h finish size, Dye-sub print on Eclipse Blockout Stretch, single sided, sewn with FCE-2 silicone beading around perimeter & pull tab in bottom right corner (WITH 1/4" NOTCH LEFT & RIGHT BOTTOM HORIZONTAL SIDE CORNERS) |
| GR-J | HP-37-J-G | 1 | GRAPHIC (J) (19.63 w X 98.37 h total size) 15.63 w X 94.37 h finish size, Dye-sub print on Backlit Textile, single sided, sewn with silicone beading around perimeter & pull tab in bottom right corner |
| GR-K | HP-37-K-G | 1 | LINER (K) (19.63 w X 98.37 h total size) 15.63 w X 94.37 h finish size, Opaque Liner, sewn with FCE-2 silicone beading around perimeter & pull tab in bottom right corner |

FABRIC, VINYL & UV GRAPHIC CARE GUIDELINES

GENERAL HANDLING FABRIC GRAPHICS

- Your fabric graphics should always be handled in a clean, dry area with clean hands. When possible, use white fabric gloves.
- Be sure fabric is clean and dry before packing.
- Machine washing and/or drying is not recommended for all fabrics. Refer to the chart below for which fabrics are washable.

EMERGENCY STAIN TREATMENT (FABRIC)

- For dry stains, like loose dirt or pencil marks, try initially using masking tape or Magic Eraser (dry-not moistened).
- Introduce water or liquids to treat stains, if at all possible, treat the stain with fabric off of the frame.

- Place a clean dry cloth behind stain (to absorb stains while being treated). Moisten another cloth initially with just water (distilled water is optimal, if available).
- Gently blot stain with moistened cloth (or small area of moistened Magic Eraser), while trying to push stain through to the back, using the dry cloth to absorb.
- Repeat using care to keep the wet area as small as possible.
- Grandma's Secret Spot remover can be an effective stain remover. Mix several drops in a small cup with clean water. Repeat above and using dry cloth on back of stain to absorb.

MACHINE WASHING FABRIC GRAPHICS

- Cold water/delicate cycle/tumble dry low or air dry. For stretch fabrics do not use dryer, let hang dry.
- Use caution on dryer time with graphics containing liners. Its best to put tension fabric on frame when fabric is still damp and let it air dry. Always be sure that the aluminum frame is clean when mounting the damp graphic.
- Fabric stretch graphics that washed and machine dried may shrink up to 3/4" per every 50" of fabric in the direction of the stretch and shrink up to 1/4" in non stretch direction.

STORING & PACKING BACKLIT GRAPHICS

- To avoid cracks in the ink or having to steam graphics, Backlit fabrics should be loosely folded with bubble wrap or stored around a tube.
- Avoid folding the graphic tightly to store in a small bag or box.

GENERAL HANDLING VINYL & UV GRAPHICS

- Vinyl banners and rigid graphics should always be handled in a clean, dry area with clean hands. When possible, use white fabric gloves.
- Be sure vinyl/ UV is clean and dry before packing. Always follow material handling and packing instructions included.
- All vinyl material should be rolled with graphic facing into protect the graphic printed side. Roll on a tube in available.
- Avoid folding material to reduce the risk of crease lines and chipped inks. If a graphic must be folded, try and fold loosely and as few times as possible.

EMERGENCY STAIN TREATMENT (UV)


- For drier stains, like loose dirt, pencil marks or adhesive, try initially using masking tape, Masking tape can be quite effective at lifting dry surface dirt. Try 'pulling' as much of stain away as you can and avoid rubbing the stain into the material.
- While using Windex® avoid scrubbing harshly. Too much pressure can fade the graphic print.

GENERAL HANDLING OF ROLLABLE PVC PANELS

All mural panels, truss panels and detachables should be rolled with the graphic facing out to protect the graphic printed side. Mural panels should be stored in the original plastic sleeves that are provided with the panels.

STEAMING FABRIC GRAPHICS

- For optimal results, steam wrinkles when fabric is tensioned and installed securely on the frame.
- Fill steamer with clean drinking water or distilled water. Avoid using water containing hard minerals.
- Hold steamer upright and hold close to fabric. Avoid touching fabric with steamer.
- Do not top steamer as water drips may cause water marks to form on graphic

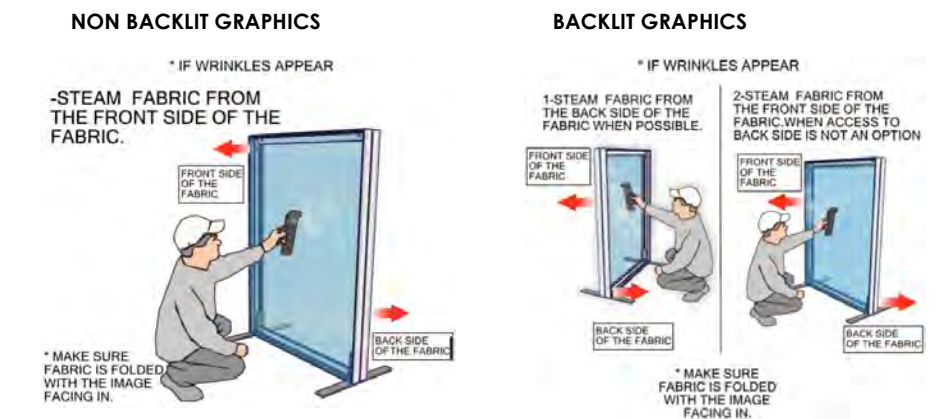


| FABRIC | WASHING MACHINE | DRY CLEAN | SPOT CLEAN | STEAMING / IRON | MAGIC ERASER |
|--------------------------|----------------------------|----------------------------|------------|------------------------|---------------------|
| RESILIENCE | NO | NO | NO | NO | YES (ONLY ON WHITE) |
| OXFORD | YES | YES | YES | YES | YES |
| POWER STRETCH | YES | YES | YES | YES | YES |
| DISPLAY POLYESTER | YES | YES | YES | YES | YES |
| DISPLY POLY TABLE THROWS | YES | YES | YES | YES | YES |
| OUTDOOR FLAG | YES (MUST VELCRO THE TABS) | N/A (MUST VELCRO THE TABS) | YES | YES | YES |
| CANVAS OUTDOOR | NO | NO | YES | STEAM ONLY | YES |
| CANVAS LIGHTBOX | NO | NO | NO | STEAM ONLY | YES |
| AGILITY | YES | YES | YES | (ONLY W/ 100% TENSION) | YES |
| SUPER STRETCH | YES | YES | YES | (ONLY W/ 100% TENSION) | YES |
| TRIPLE WHITE | YES | YES | NO | YES | NO |
| ECLIPSE | NO | NO | YES | STEAM ONLY | YES |
| SOFT KNIT | YES | YES | YES | YES | YES |
| SHEER | YES | YES | YES | YES | YES |
| | | | | | |
| VINYL & ROLLABLE | SOLVENT | SOAPY WATER (Dawn) | WINDEX | | |
| FLATMAXX | ONLY ON WHITE | YES | NO | | |
| SCRIM 13OZ/ 18OZ | ONLY ON WHITE | YES | NO | | |
| VINLY 20OZ | ONLY ON WHITE | YES | NO | | |
| MELINEX | NO | YES | NO | | |
| MURAL PANELS | NO | YES | YES | | |
| UV RIDGED | NO | YES | YES | | |

SET-UP NOTES

Redesign of this exhibit without approval by Orbus may result in dangerous and unsafe structures. Nimlok disclaims any responsibility for redesigned exhibits it does not approve in writing.

Parts and components such as panels and extrusions are manufactured to metric sizing. Where ever possible sizes have been noted in feet and inches as well as in metric. Below is the imperial to metric sizing table for reference. "Nominal" refers to approximate size.

NOTE: PARTS MAY COME PRE-ASSEMBLED FOR PACKING PURPOSES.

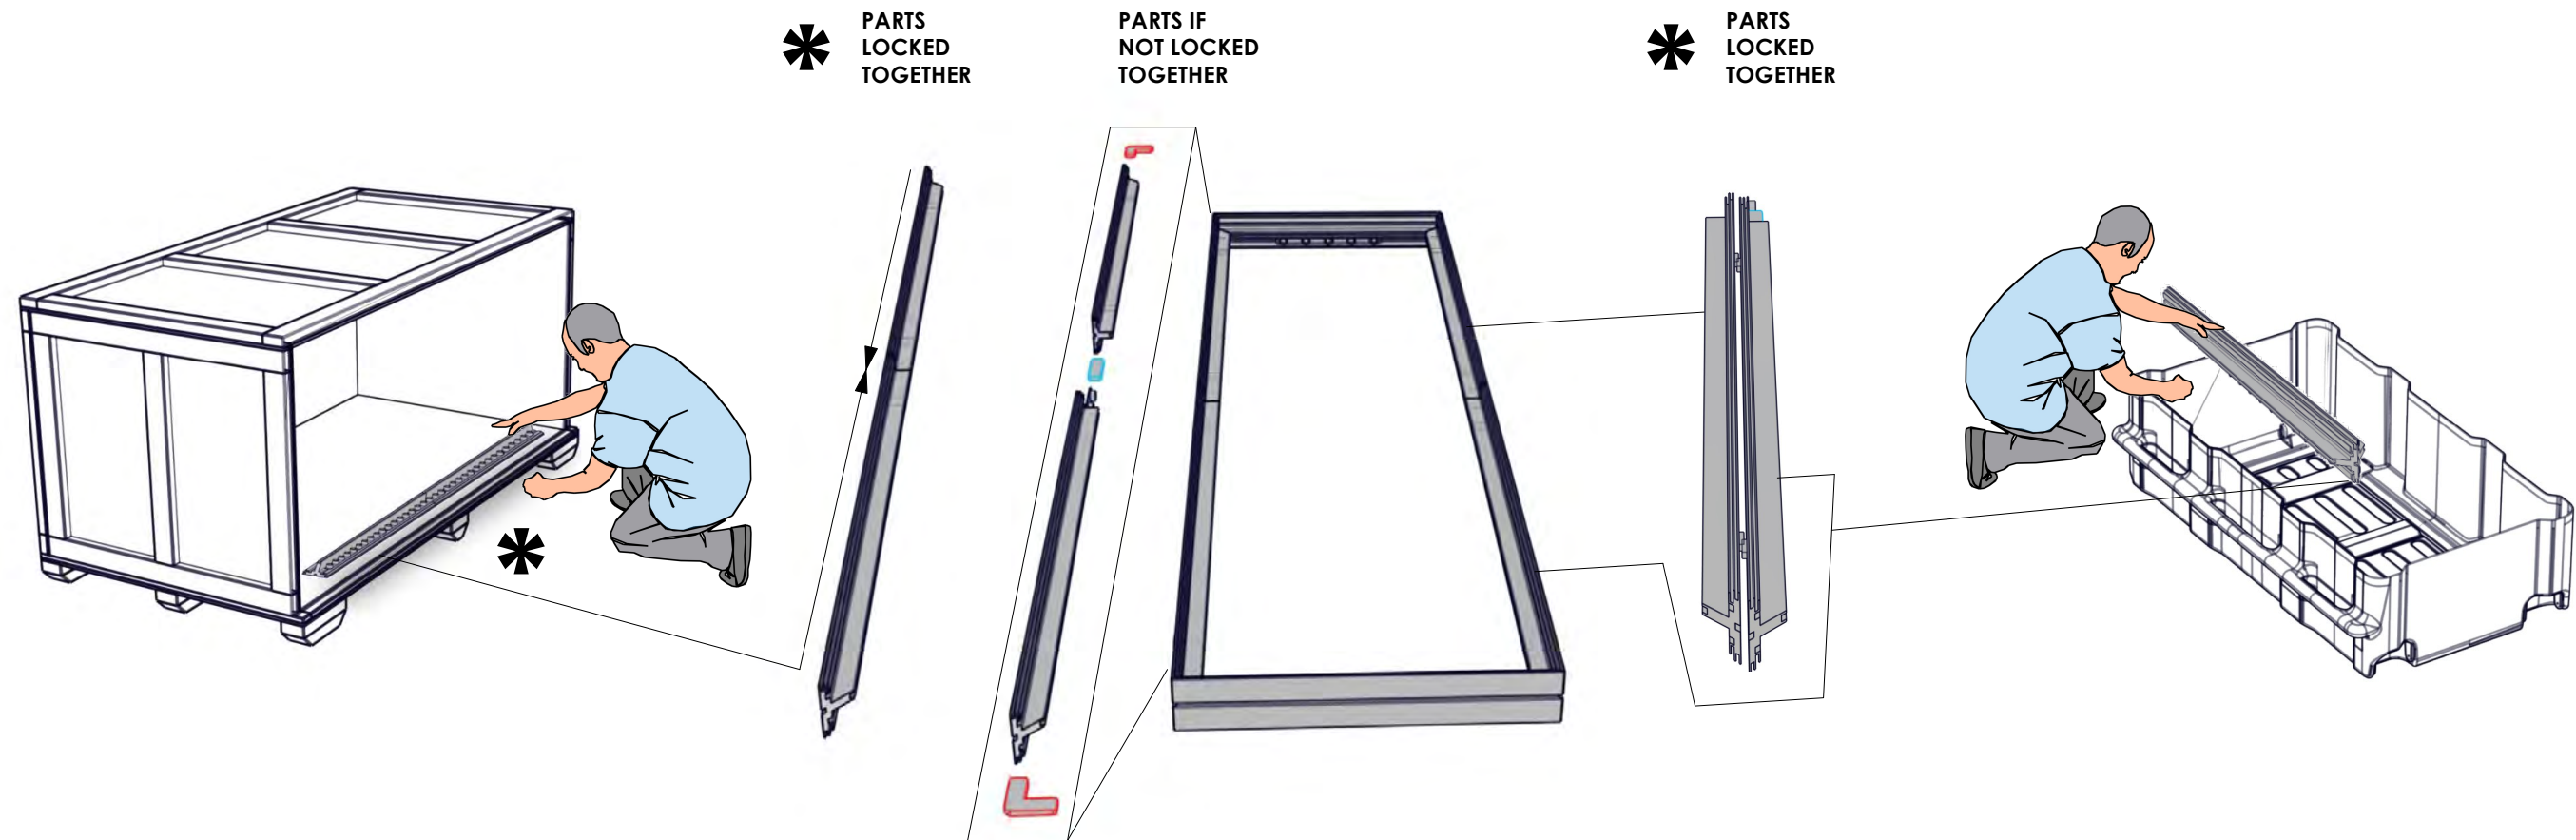







*** PARTS LOCKED TOGETHER**

PARTS IF NOT LOCKED TOGETHER

*** PARTS LOCKED TOGETHER**

METRIC TO IMPERIAL DIMENSION


| | |
|---------------------|---------------------|
| 2400mm = (94.50") | 1200mm = (47.25") |
| 2100mm = (82.67") | 900mm = (35.50") |
| 1800mm = (70.87") | 600mm = (23.62") |
| 1500mm = (59.05") | 300mm = (11.81") |


-  Internet Connection
-  Phone Line
-  Main Electric Drop (Point Of Distribution)
-  Electrical Outlet
-  Sharp Edges
-  Cables Under Carpet

HELPFUL SETUP QR CODES




**SCAN QR CODES
WITH YOUR PHONE
CAMERA**

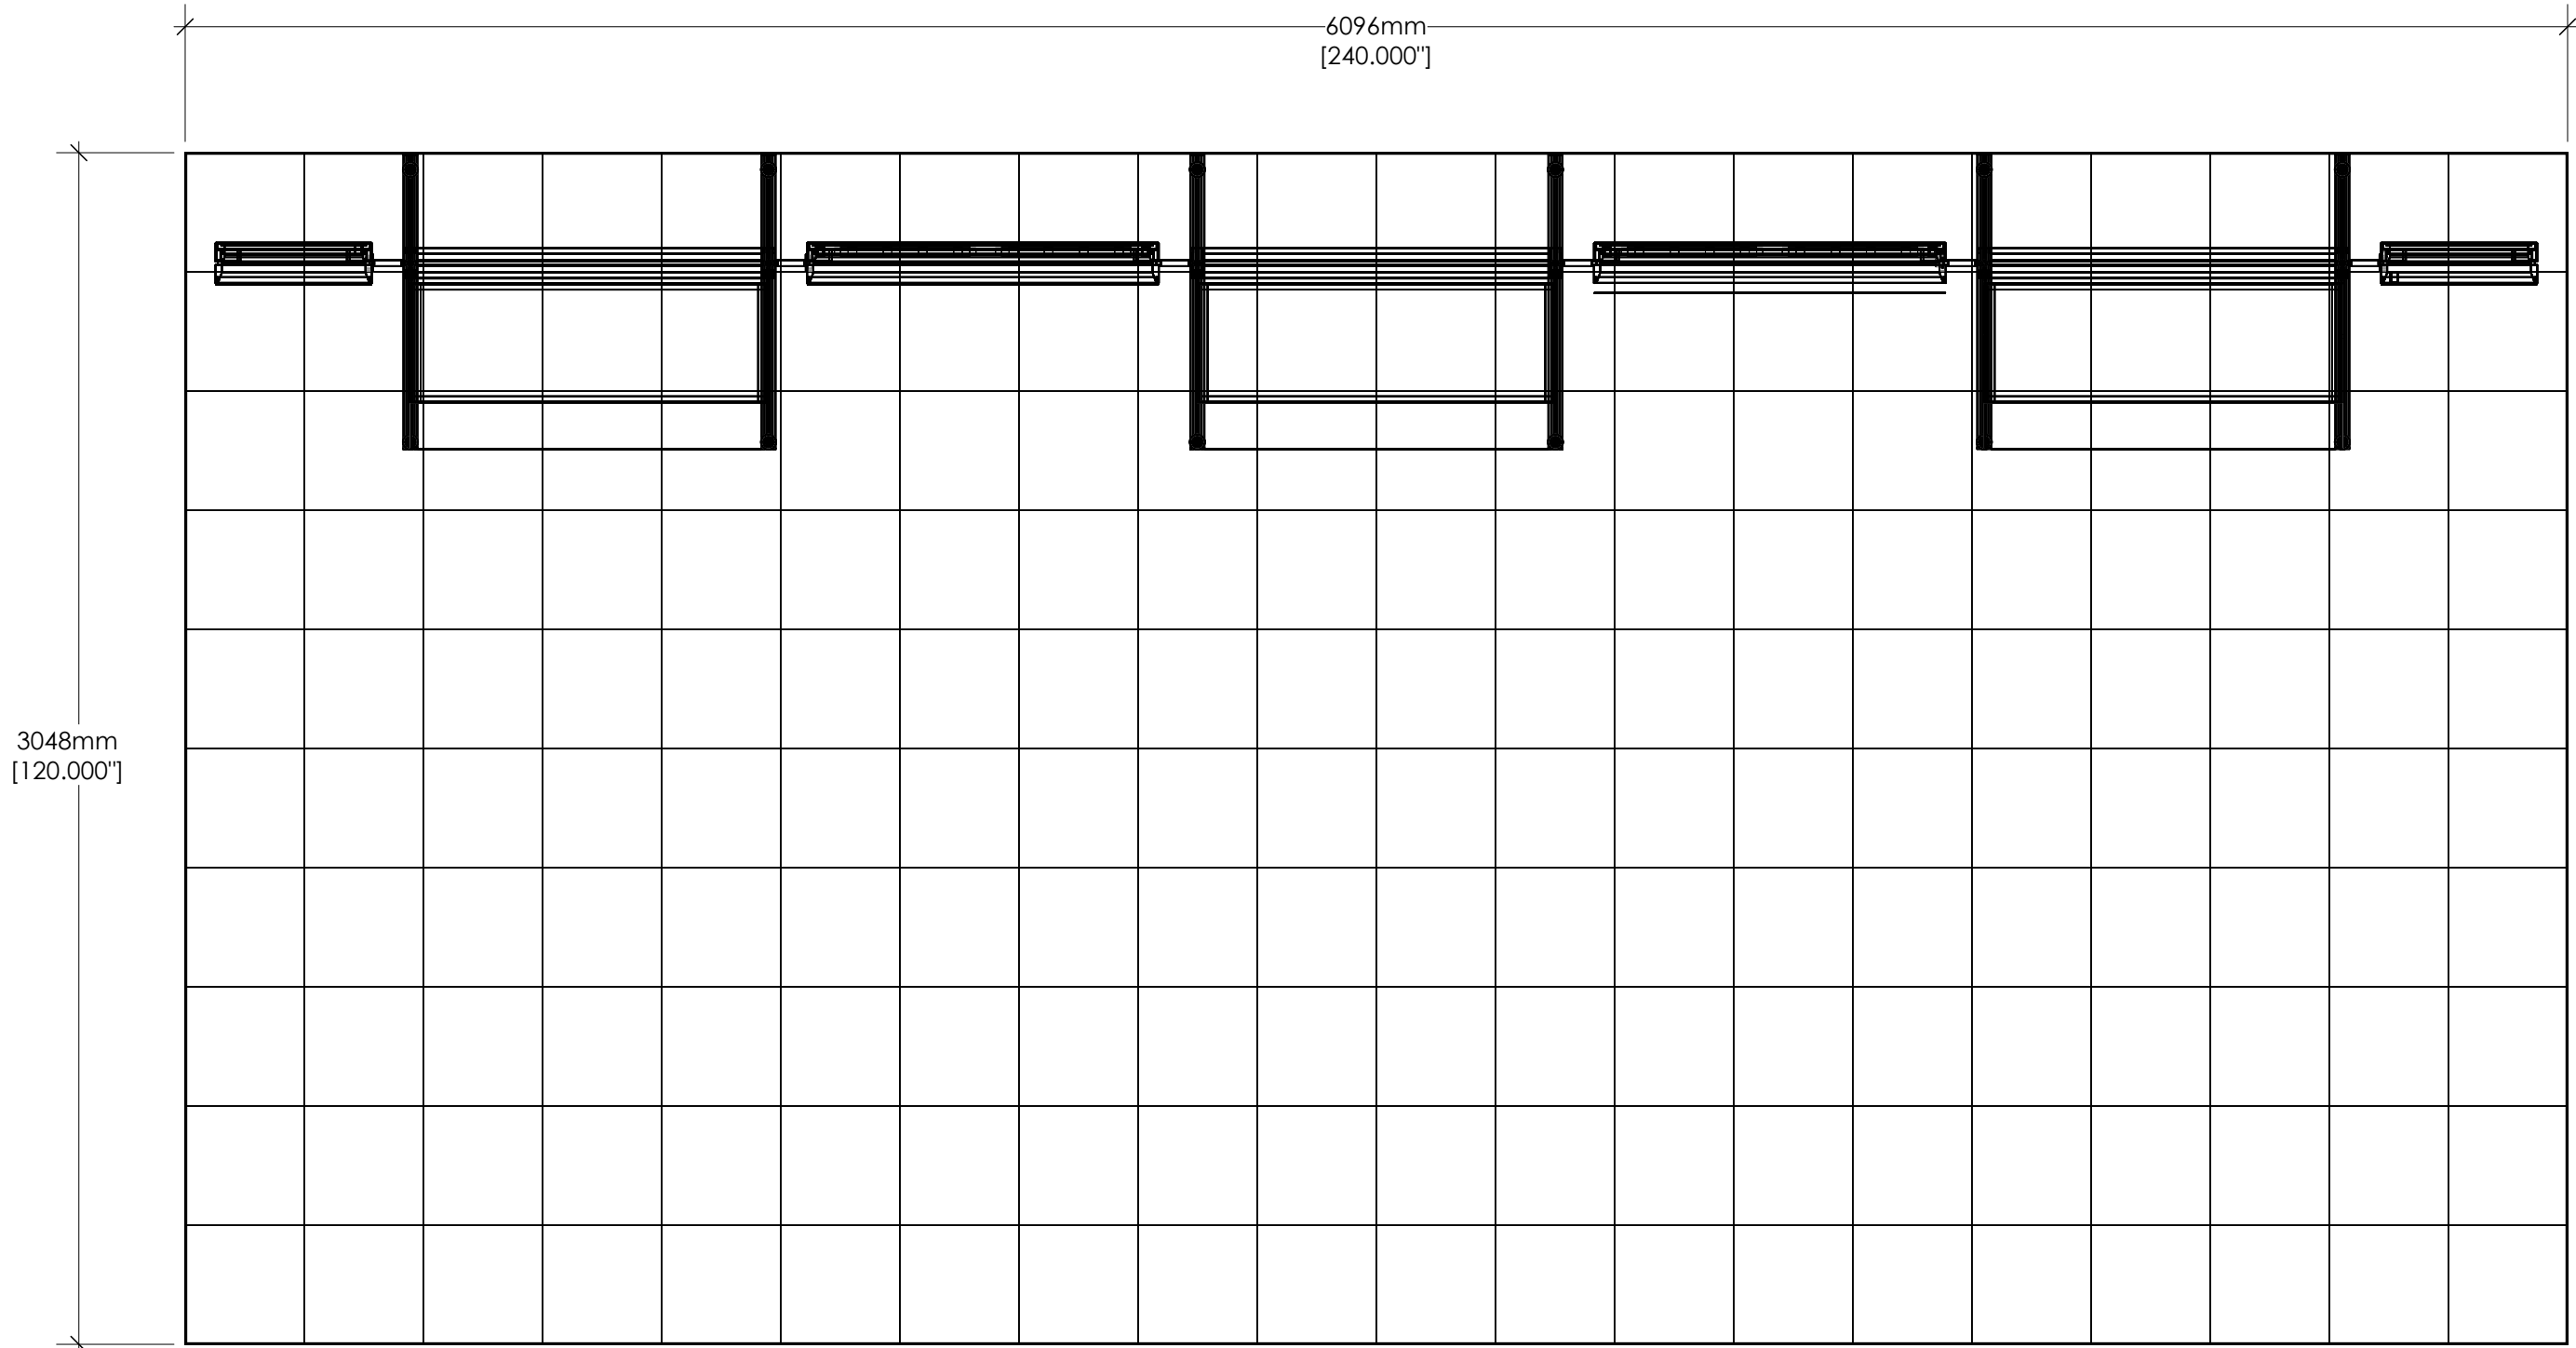

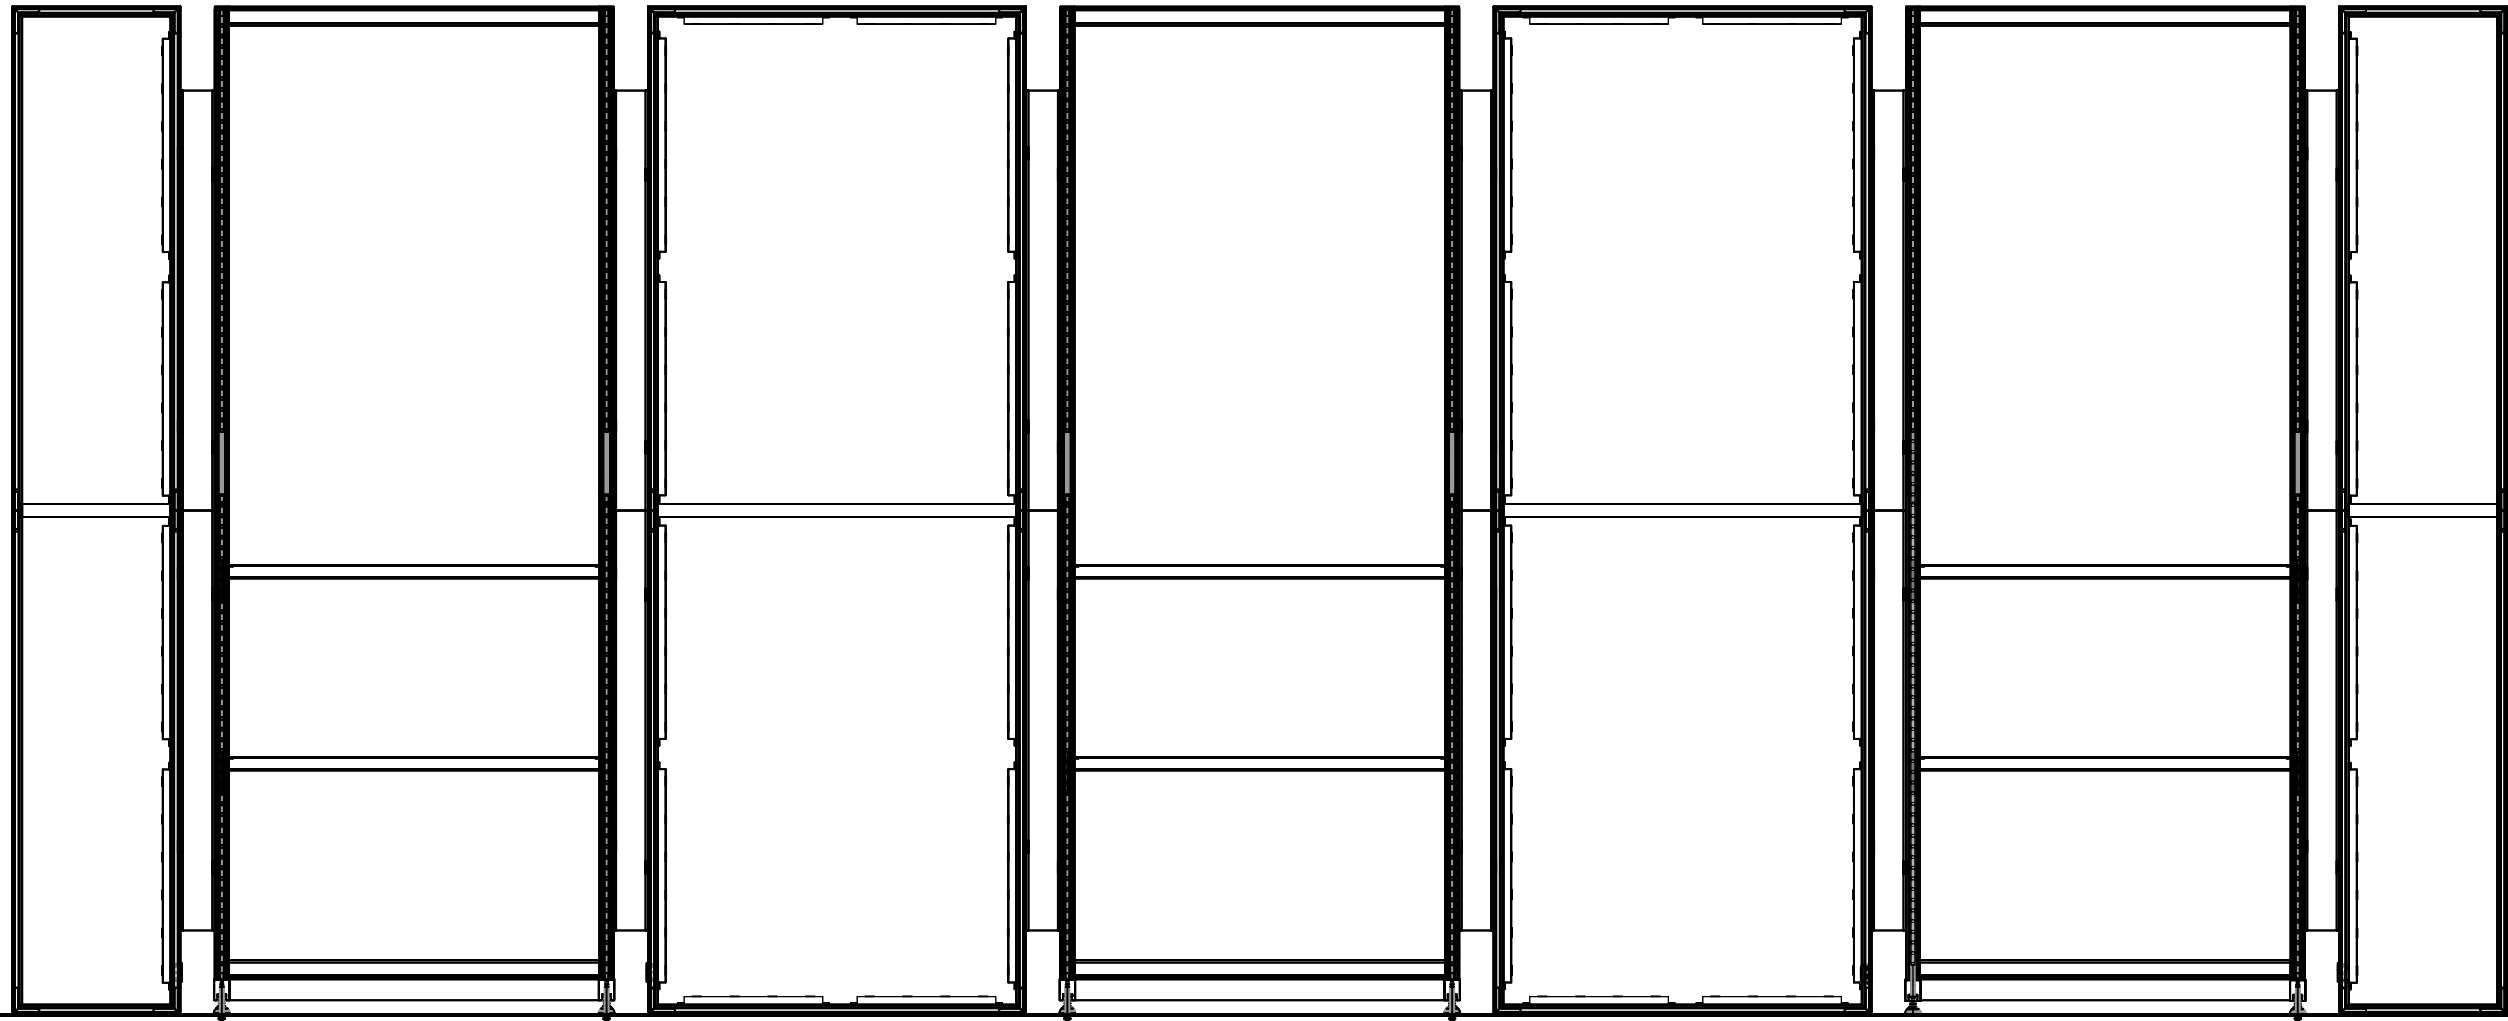

2400mm
[94.473"]

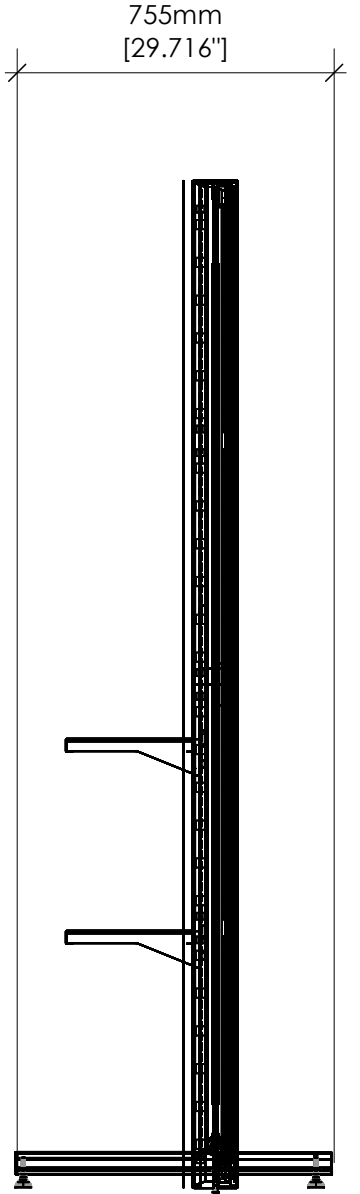


755mm
[29.716"]

FP




| SETUP# | # | DESCRIPTION |
|----------|----|---|
| A8 | 6 | 750MM (29.53IN) LENGTH OF 824 CORNER POST EXTRUSION -WITH THRU HOLE FOR 3/8 BOLT, 38.1MM FROM END |
| MFY-EPIN | 6 | MODify Tapered Extension Pin, 5/16-18 thread |
| A9 | 12 | 1155MM (45.47in) OF 830 SINGLE SIDED UPRIGHT OPEN EXTRUSION |




BUILD 6 POSTS

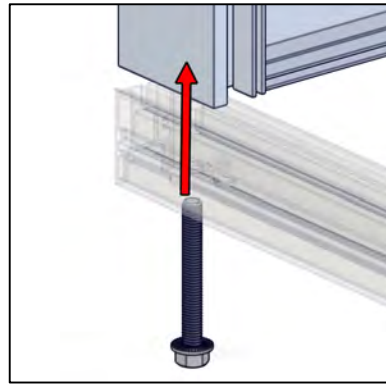


MFY-BOLT-375-16-2.5

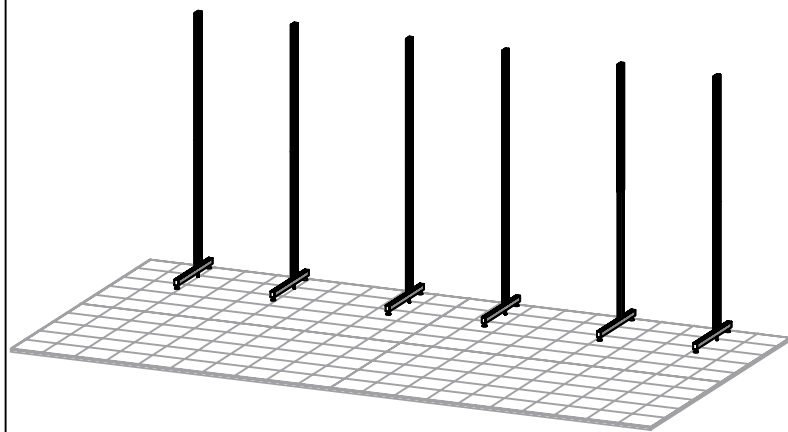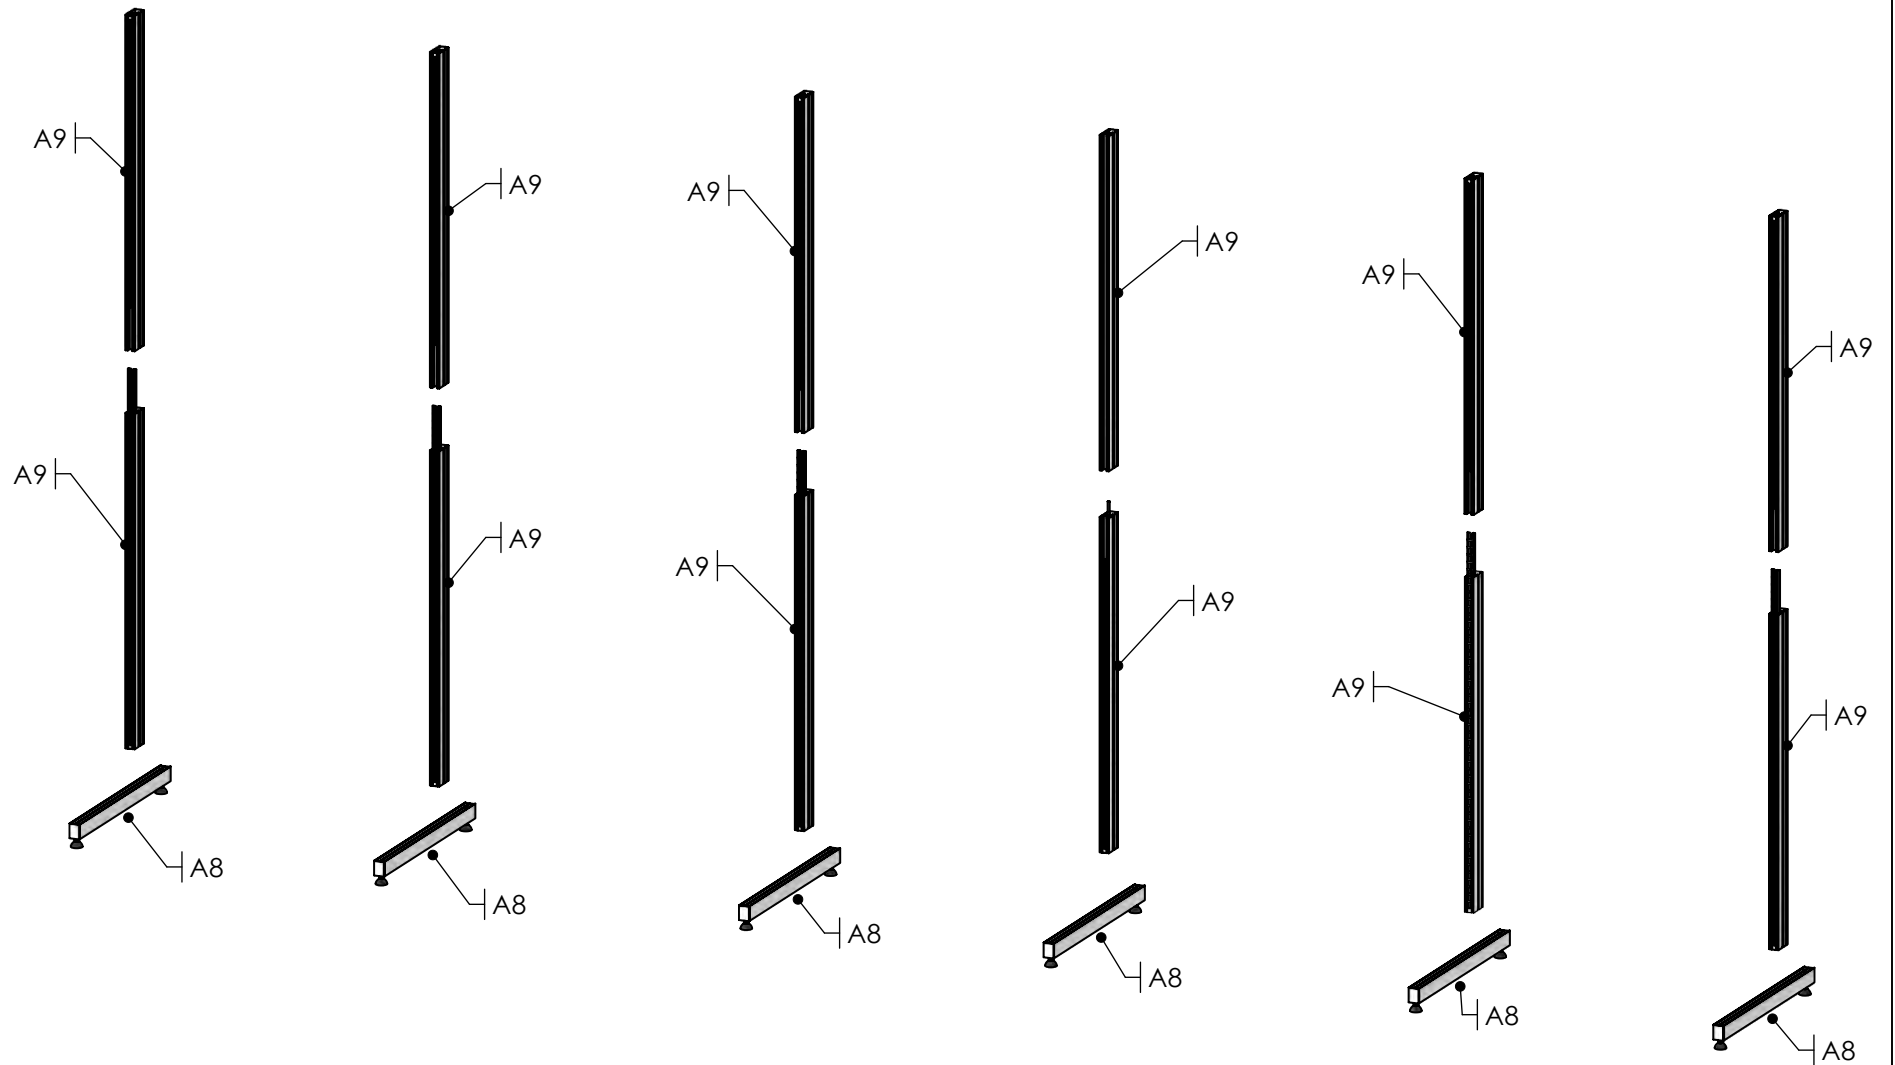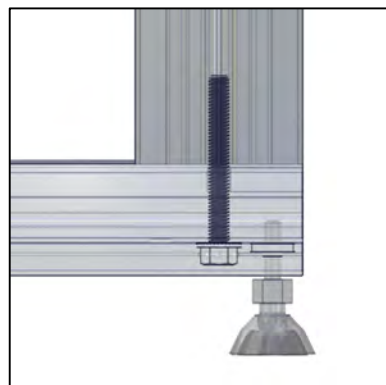


COMPONENTS
IN THIS STEP:
(Not to scale)




| SETUP# | # | DESCRIPTION |
|--------|---|---|
| A10 | 6 | 883MM (34.76in) OF 835 DOUBLE SIDED SEG EXTRUSION -WITH CAM LOCKS BOTH ENDS |
| 830-EC | 6 | 7MM SEG PLASTIC END CAP FOR 830 EXTRUSION |

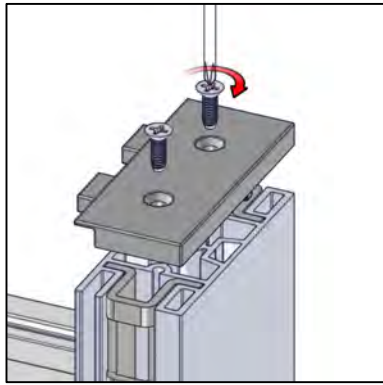


LOOSEN END CAP TO ATTACH TOP CROSS BRACE

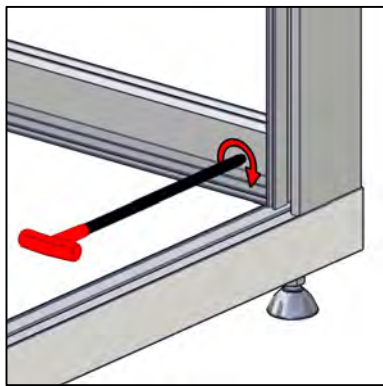



CROSS BRACE SITS ON SUPPORT LEGS

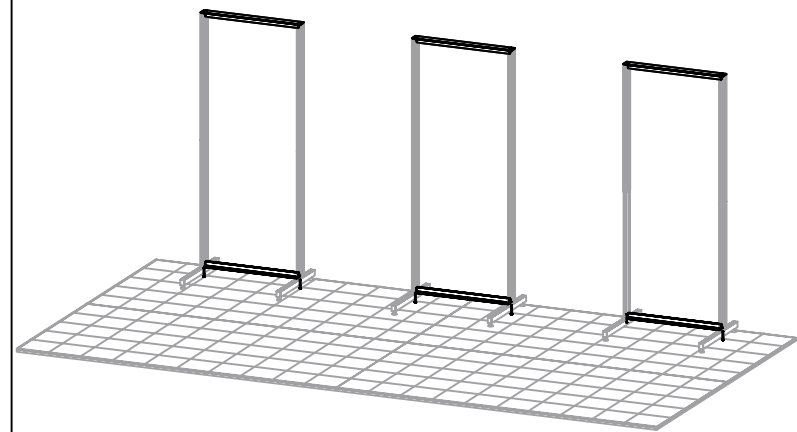




COMPONENTS
IN THIS STEP:
(Not to scale)

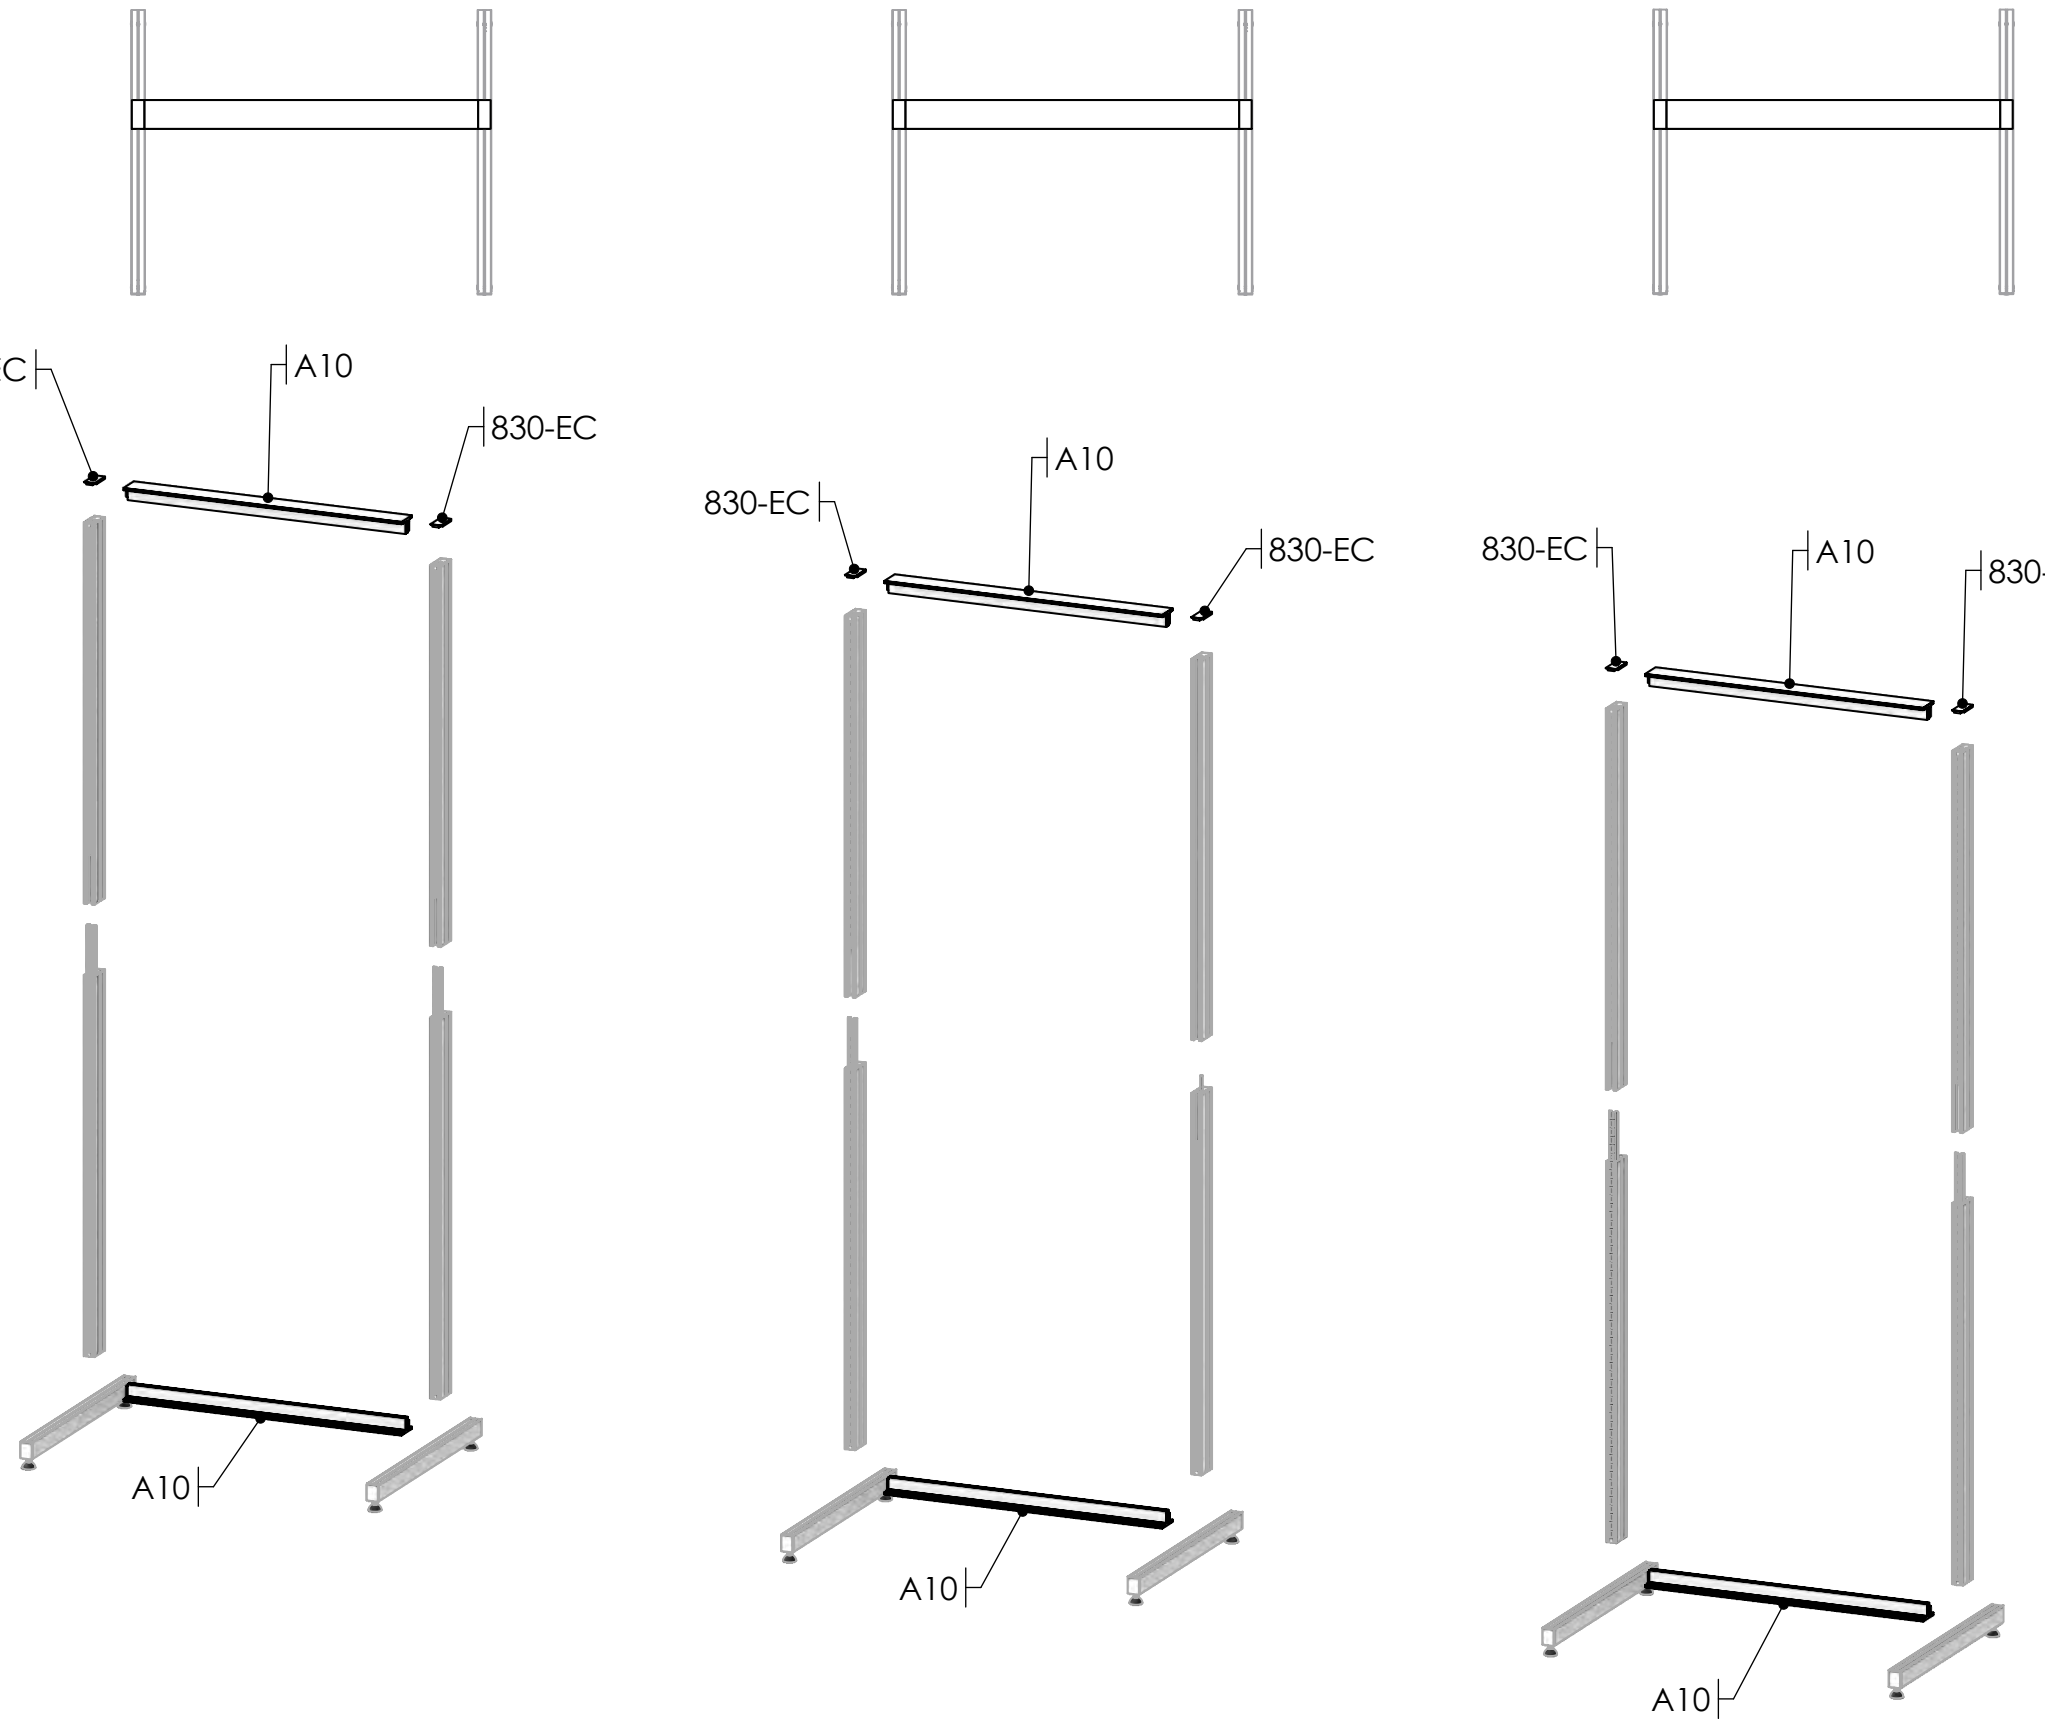

| SETUP# | # | DESCRIPTION |
|--------|----|---|
| A3 | 12 | 1000MM LENGTH OF PH2 EXTRUSION-WITH SIDE LOCKS BOTH SIDES |

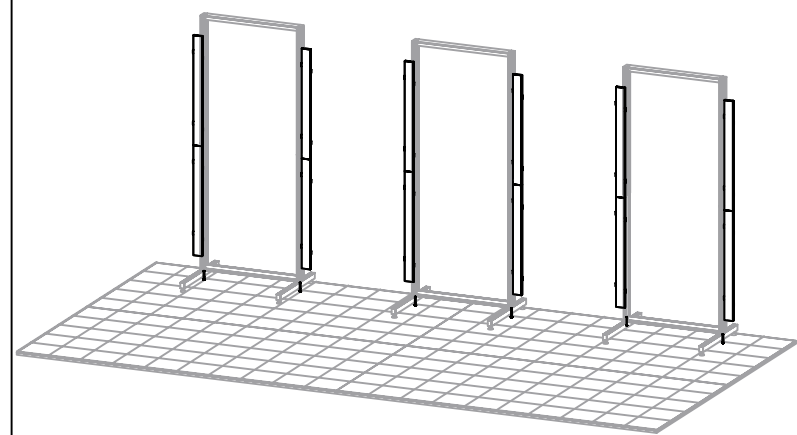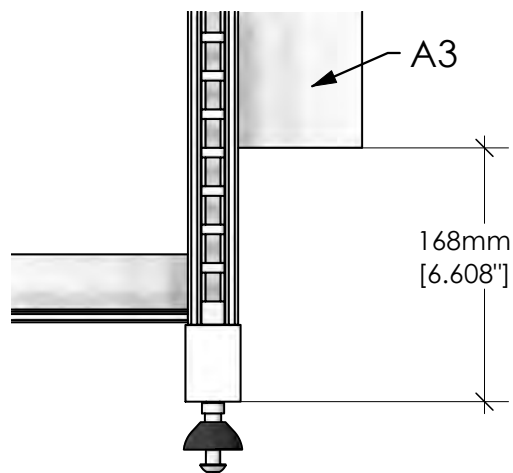

BUILD X3 UNITS

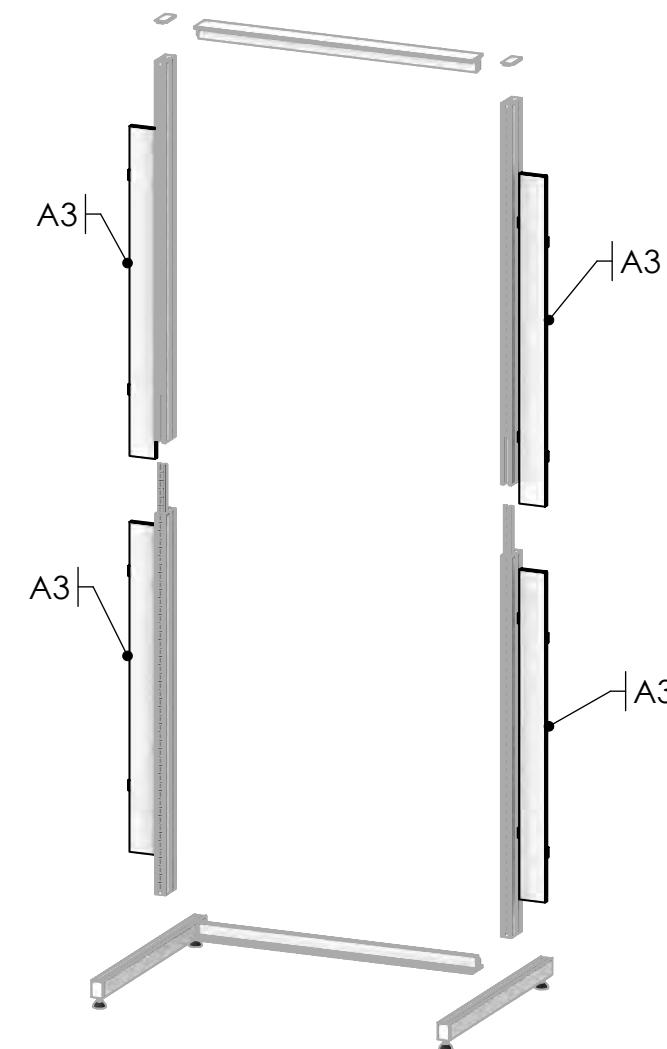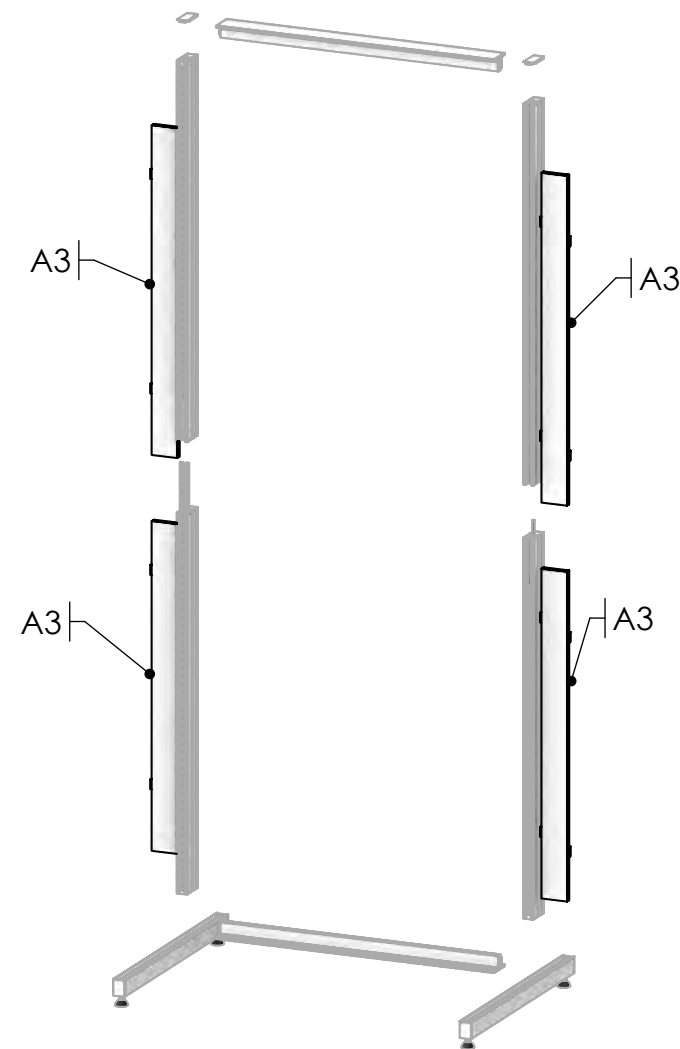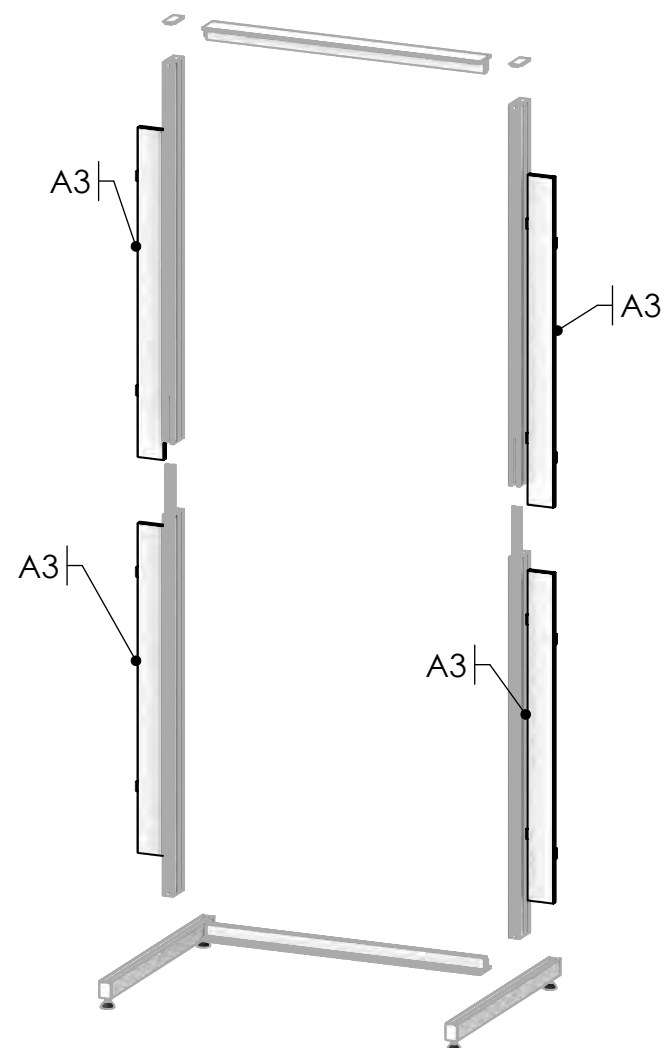


COMPONENTS
IN THIS STEP:
(Not to scale)



102 (PH2)


LED Lights

Installing the LED light fixtures.

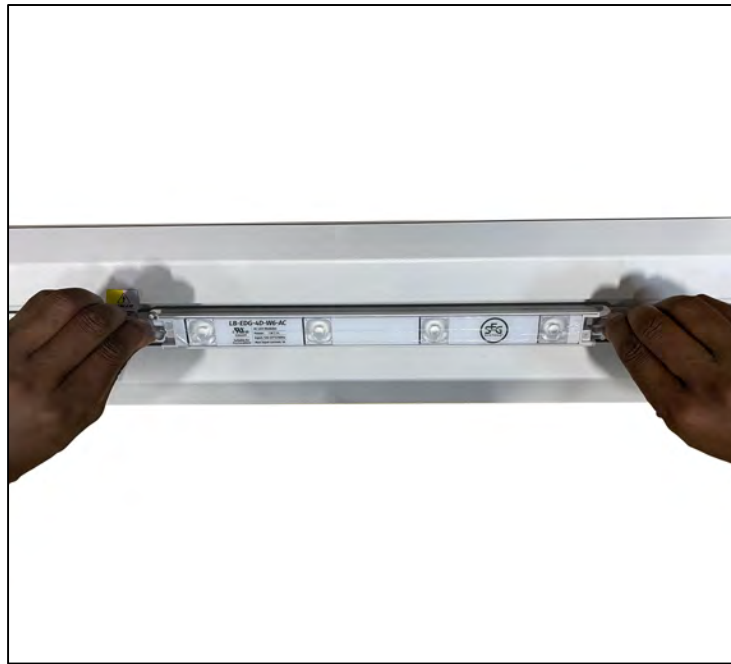


STEP-1

Secure the LED lights with twist clips on both ends.

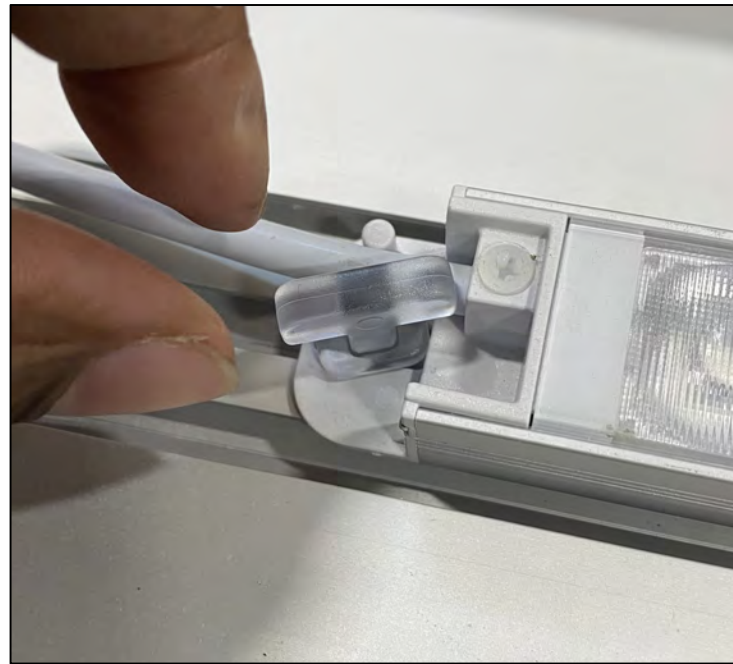

STEP-2





Rotate the twist clips 90 degrees at both ends to secure to the extrusion.

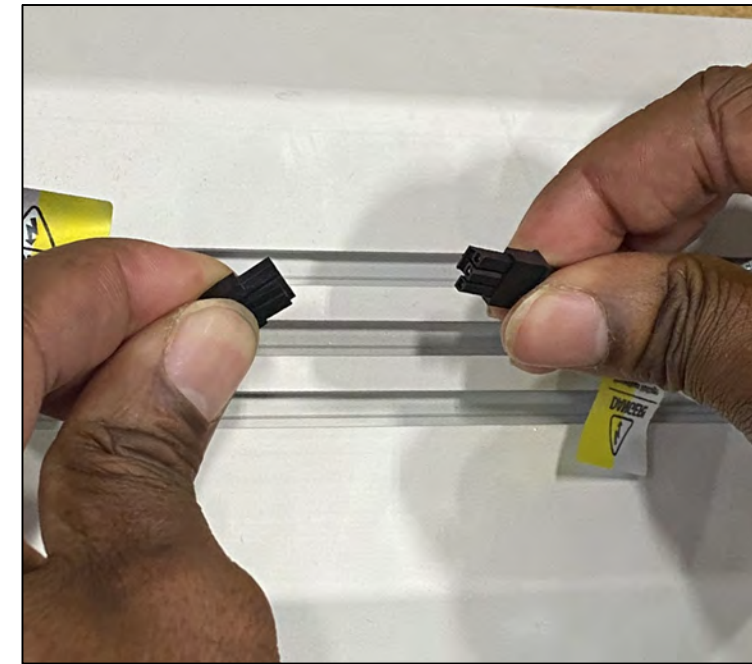



STEP-3

Connect the lead at both ends of the LED fixture as shown. Take note of male and female ends.

| SETUP# | # | DESCRIPTION |
|--------|---|---|
| CB10 | 8 | CB10 90 DEGREE CONNECTOR |
| A5 | 4 | 900MM (35.43in) LENGTH OF 348 SILVER EXTRUSION-WITH MITRE CUT BOTH ENDS |
| IB2-O | 4 | JOINER BAR (OLD STYLE) |
| A11 | 2 | 1200MM (47.24in) LENGTH OF 348 SILVER EXTRUSION-WITH MITRE CUT LEFT END FOR CB10-IB2 LOCK HOLE RIGHT END-WITH GROMMET HOLE 100MM FROM LEFT END. |
| A12 | 3 | 1200MM (47.24in) LENGTH OF 348 SILVER EXTRUSION-WITH MITRE CUT LEFT END FOR CB10-IB2 LOCK HOLE RIGHT END |
| A6 | 2 | 1200MM (47.24in) LENGTH OF 348 SILVER EXTRUSION-WITH MITRE CUT RIGHT END FOR CB10-IB2 LOCK HOLE LEFT END |
| A2 | 2 | 854MM LENGTH OF PH1 POWDERCOATED EXTRUSION-WITH CAM LOCKS BOTH ENDS |
| A7 | 1 | 1200MM (47.24in) LENGTH OF 348 SILVER EXTRUSION-WITH MITRE CUT LEFT END FOR CB10-IB2 LOCK HOLE RIGHT END |

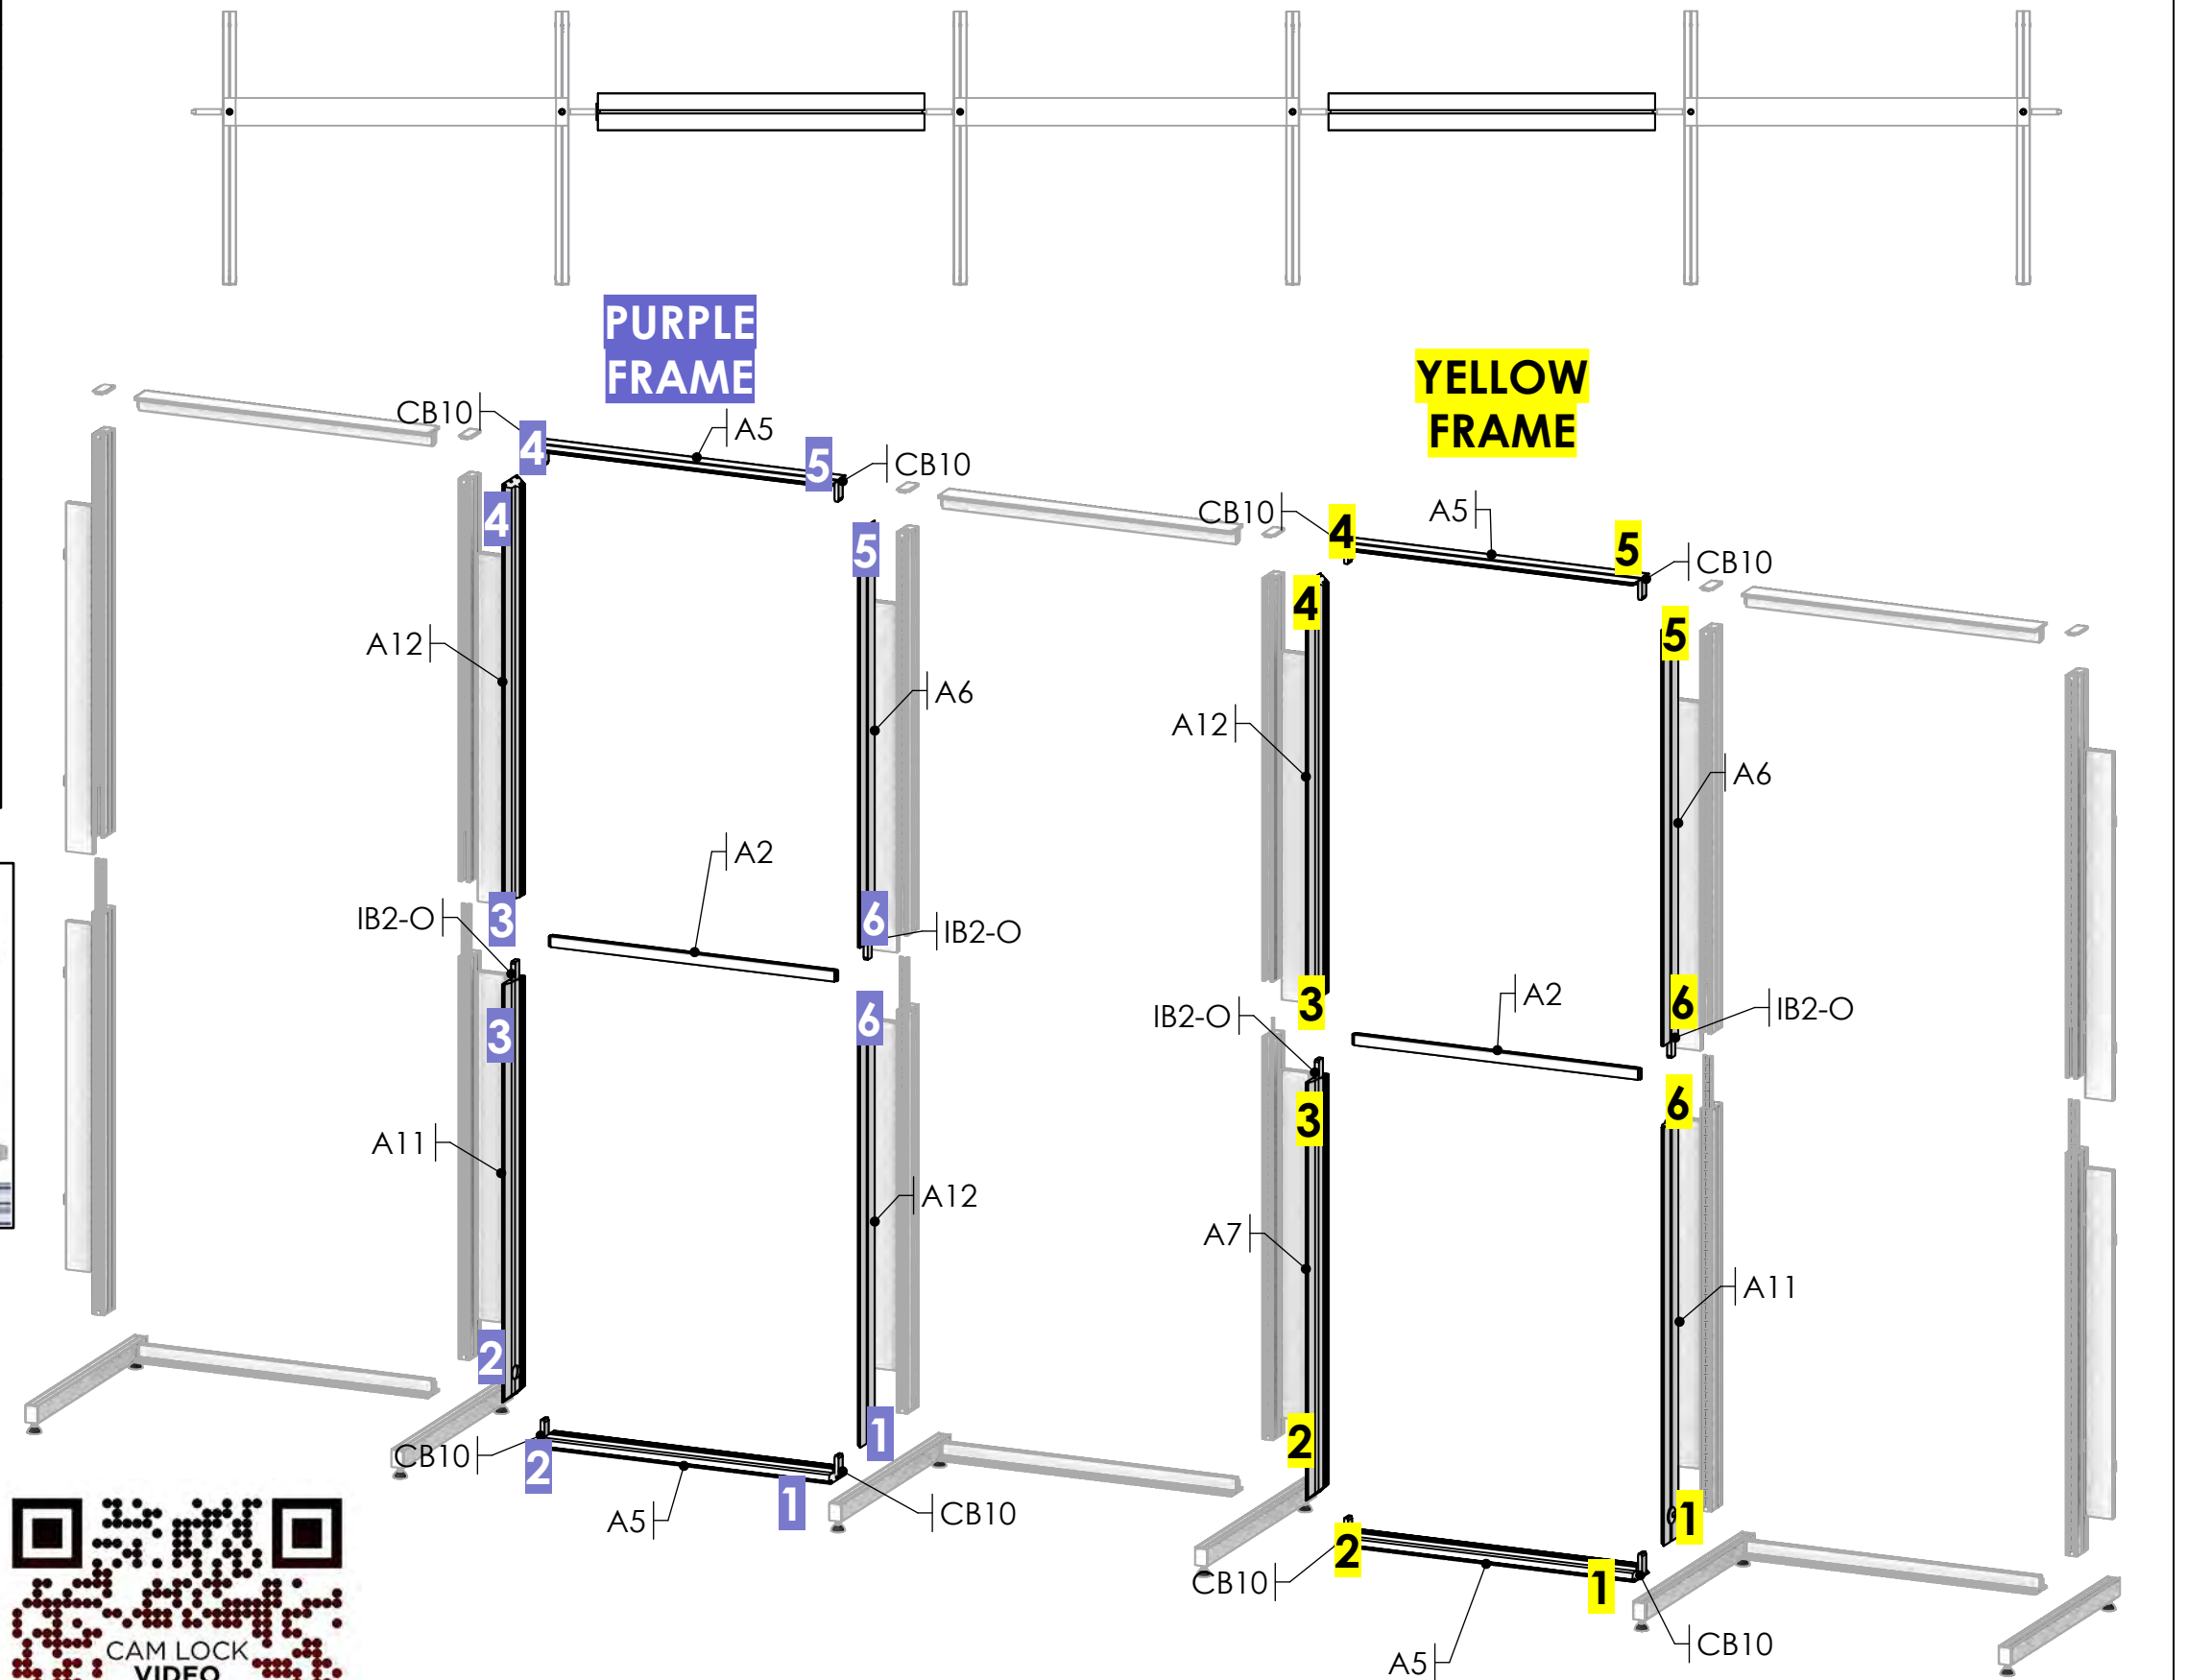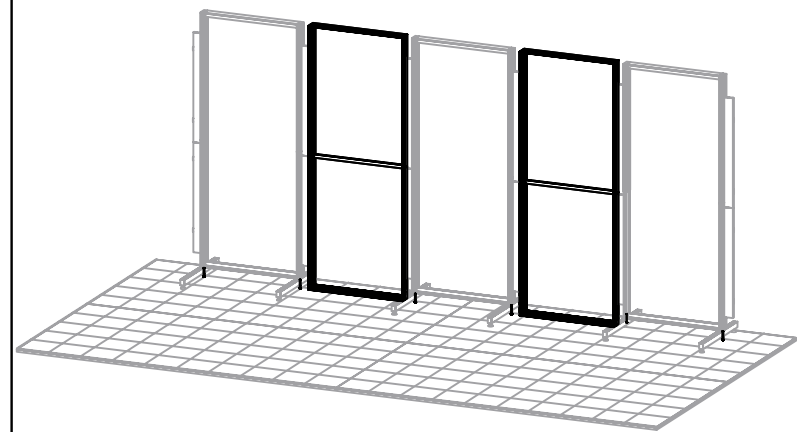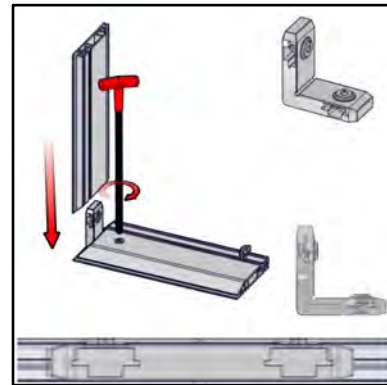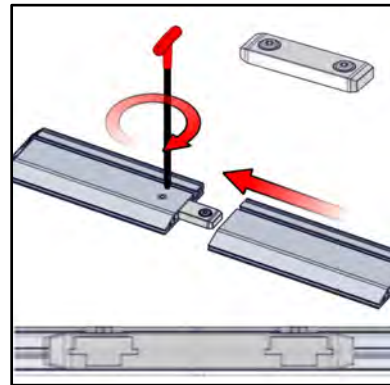


| | | |
|--|--|--|
| COMPONENTS IN THIS STEP: (Not to scale) |  348 |  101 (PH1) |
|--|--|--|









| SETUP# | # | DESCRIPTION |
|-----------|----|--|
| LED-EV-TH | 48 | THUMB KNOB, ORBUS VERSION, FOR LED LIGHT BAR |
| LED-EV-W | 16 | LIGHT BAR (SEG), AC POWER, 6000K, 21" L |
| LED-EV-W | 8 | LIGHT BAR (SEG), AC POWER, 6000K, 14" L |




BUILD X2 UNITS

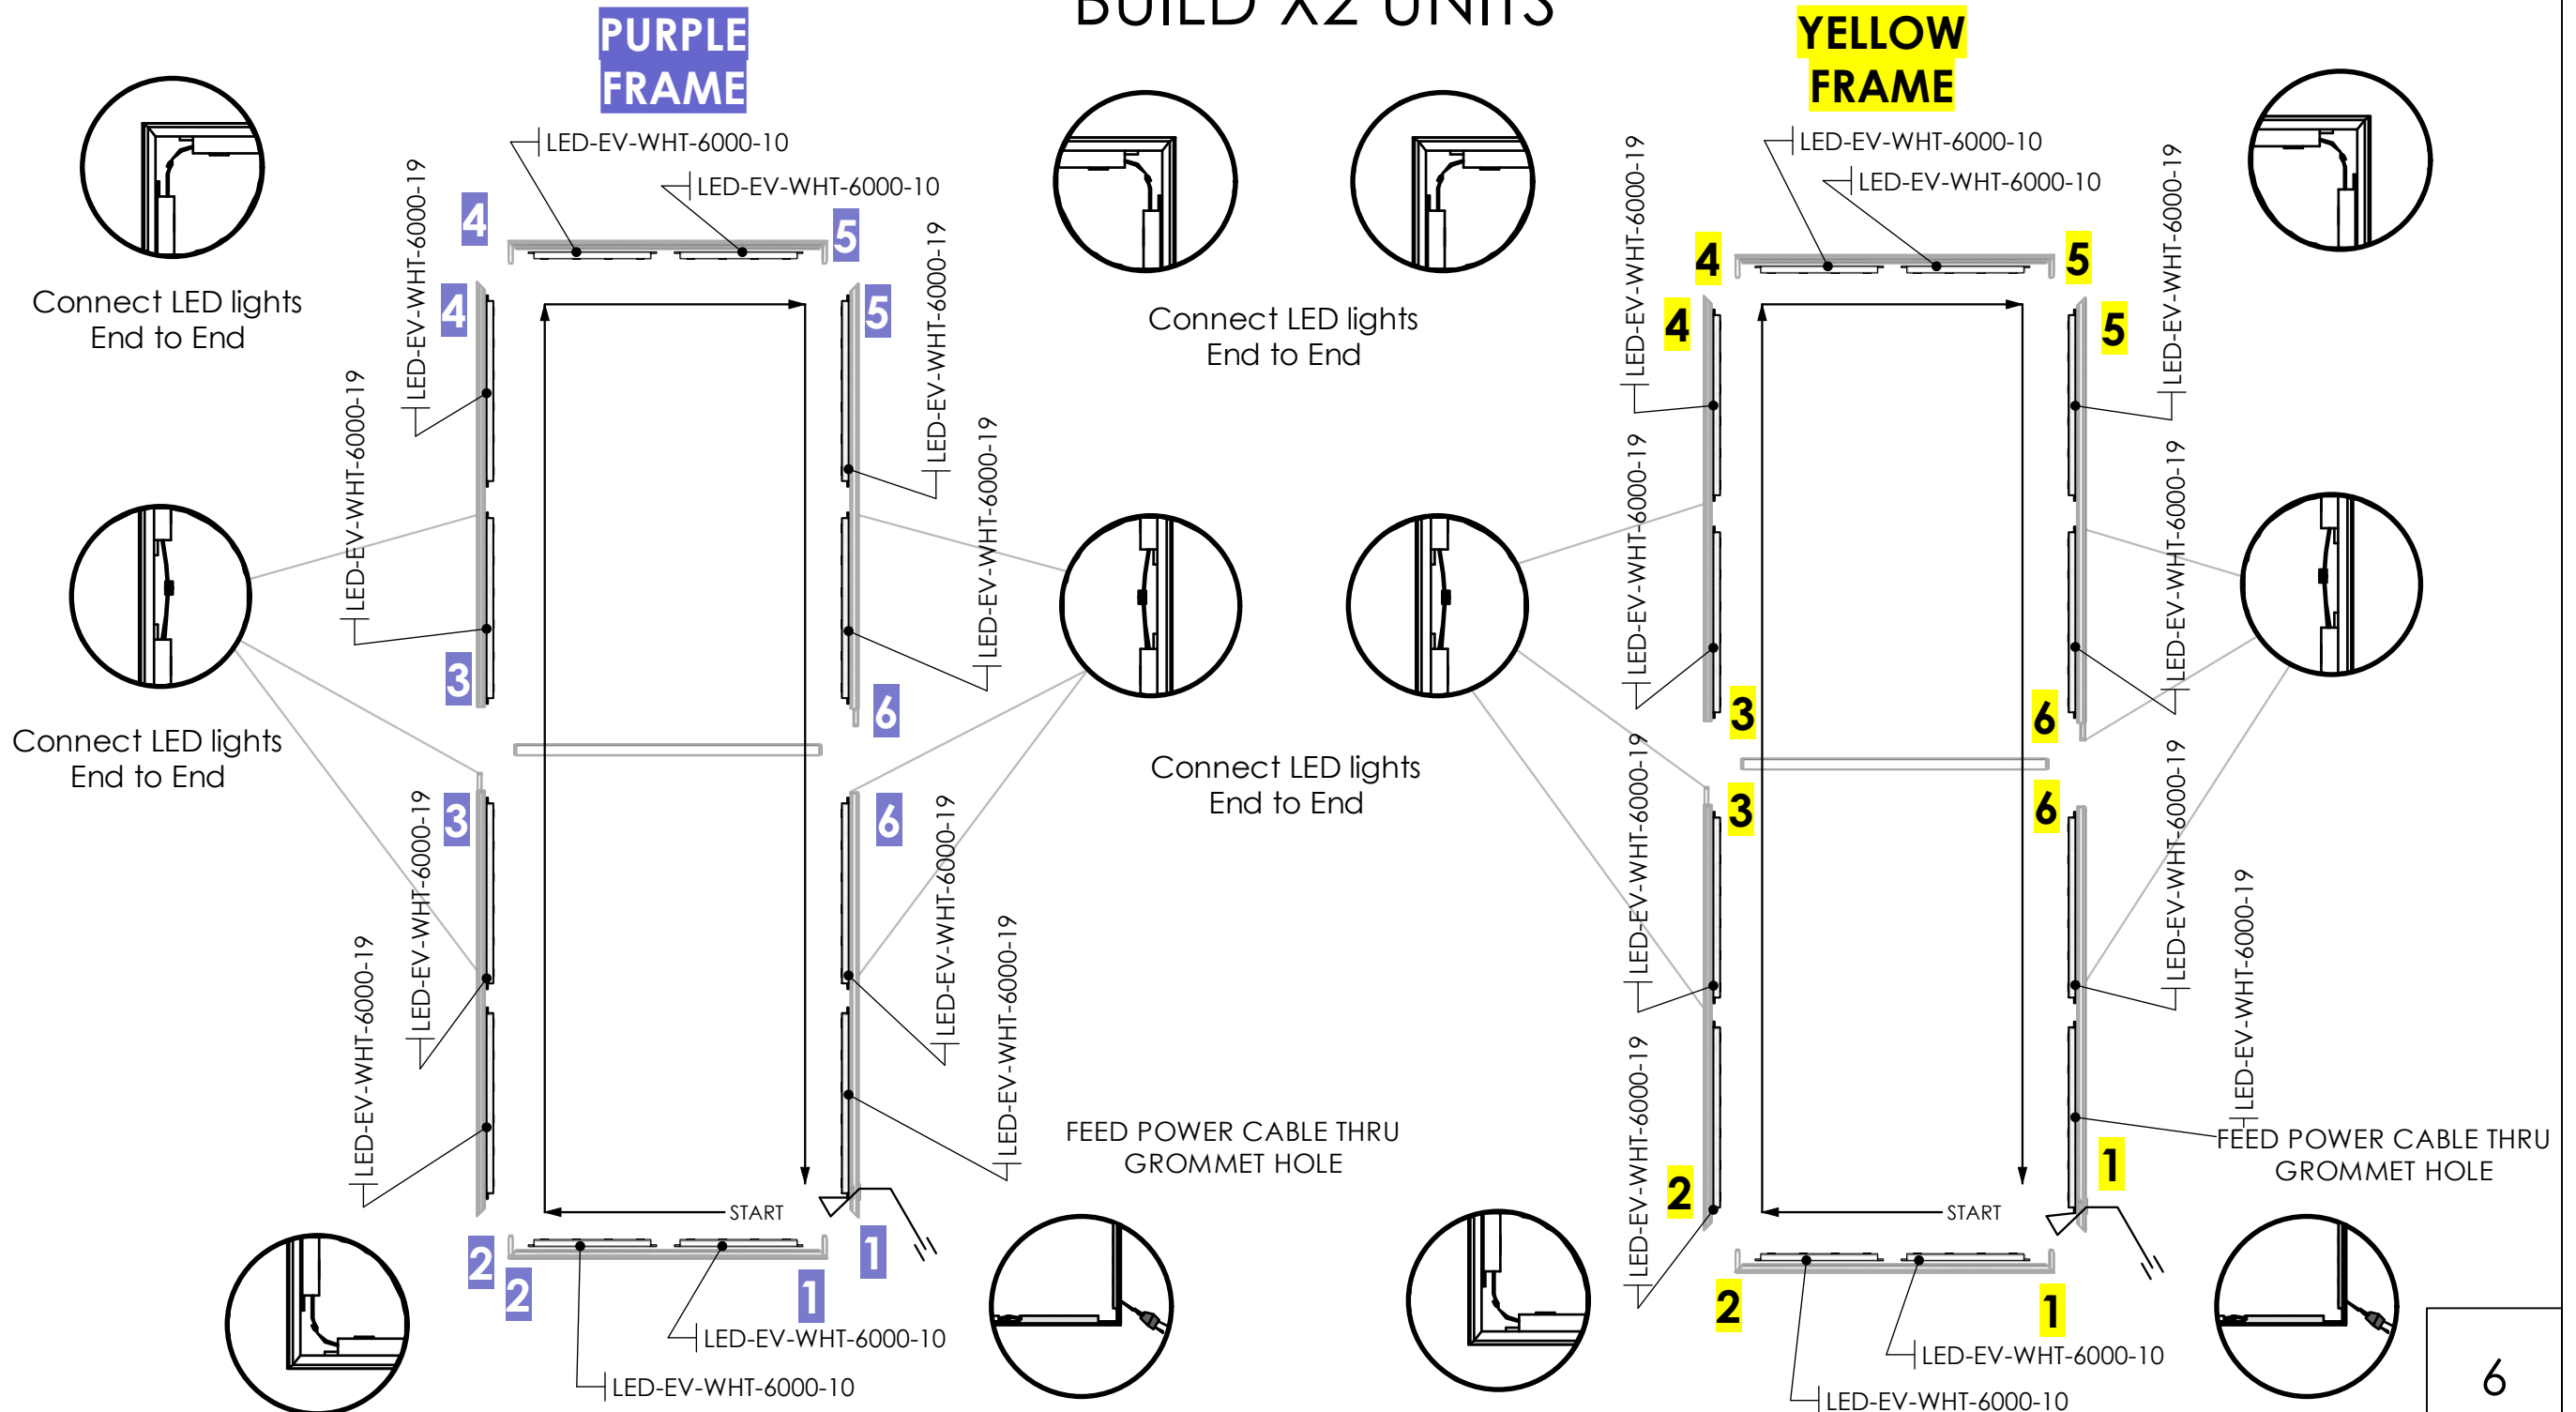



| SETUP# | # | DESCRIPTION |
|--------|---|---|
| CB10 | 8 | CB10 90 DEGREE CONNECTOR |
| A4 | 4 | 400MM (15.75in) LENGTH OF 348 SILVER EXTRUSION-WITH MITRE CUT BOTH ENDS |
| IB2-O | 4 | JOINER BAR (OLD STYLE) |
| A6 | 3 | 1200MM (47.24in) LENGTH OF 348 SILVER EXTRUSION-WITH MITRE CUT RIGHT END FOR CB10-IB2 LOCK HOLE LEFT END |
| A12 | 3 | 1200MM (47.24in) LENGTH OF 348 SILVER EXTRUSION-WITH MITRE CUT LEFT END FOR CB10-IB2 LOCK HOLE RIGHT END |
| A11 | 2 | 1200MM (47.24in) LENGTH OF 348 SILVER EXTRUSION-WITH MITRE CUT LEFT END FOR CB10-IB2 LOCK HOLE RIGHT END-WITH GROMMET HOLE 100MM FROM LEFT END. |
| A1 | 2 | 354MM LENGTH OF PH1 POWDERCOATED EXTRUSION-WITH CAM LOCKS BOTH ENDS |

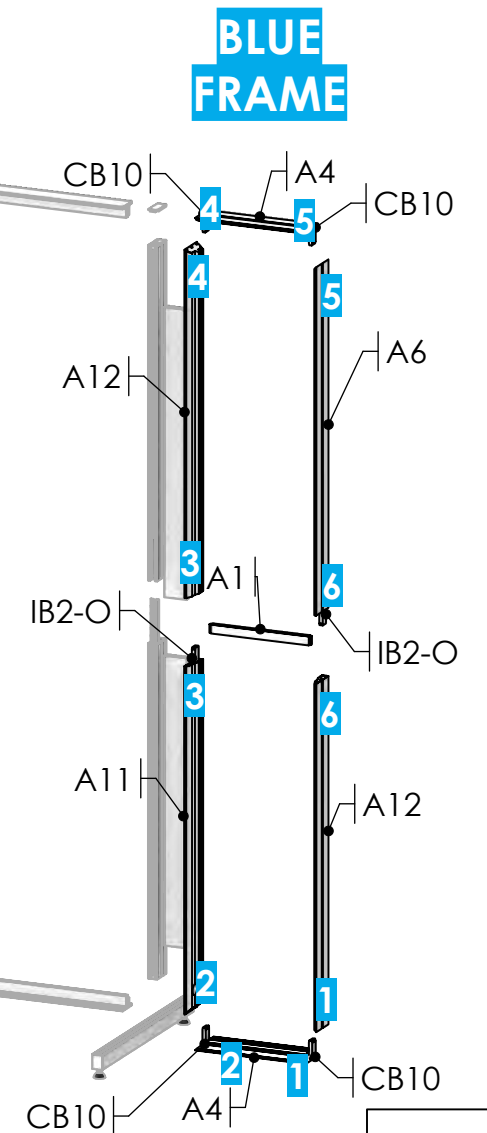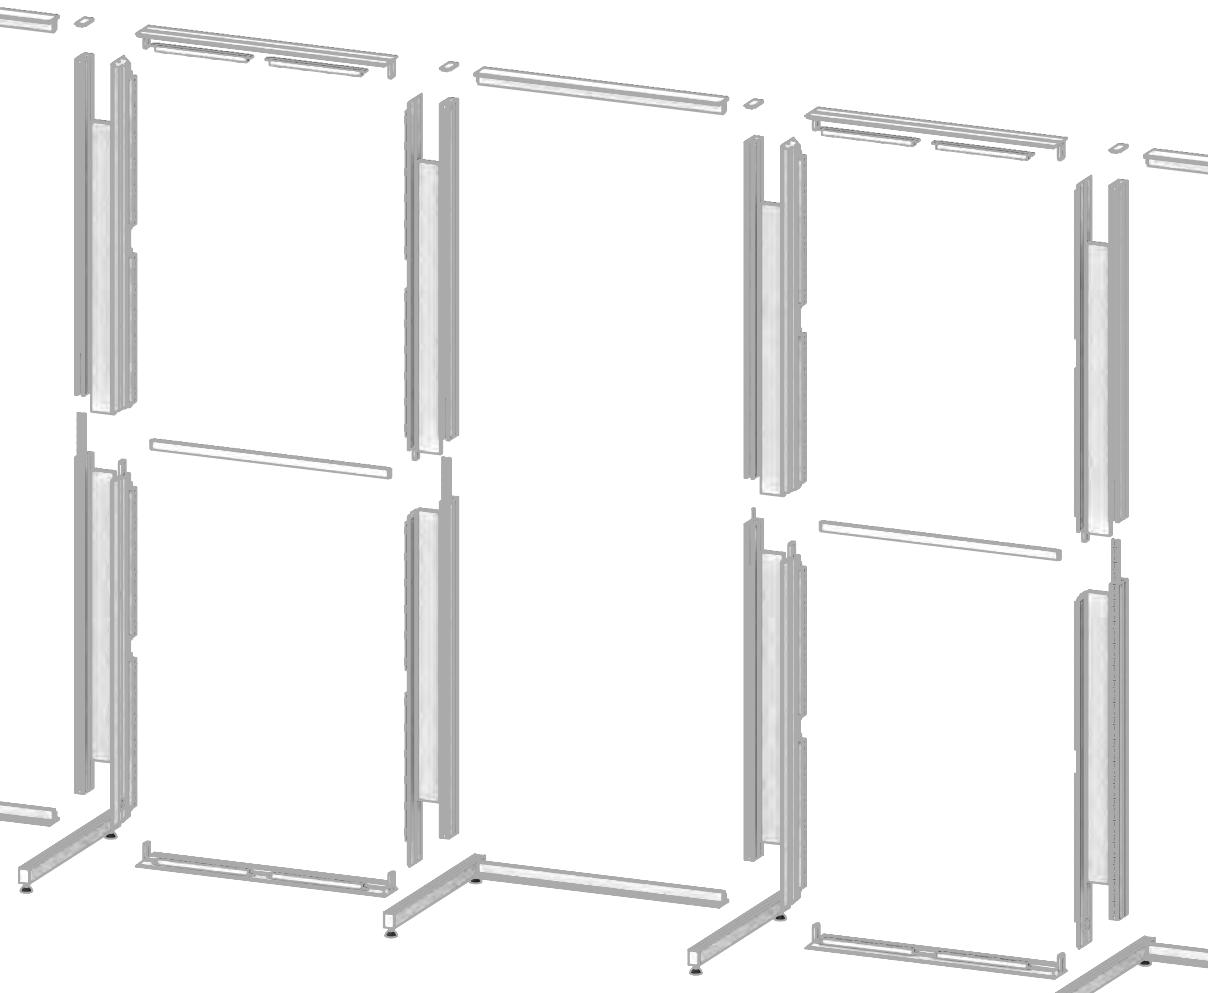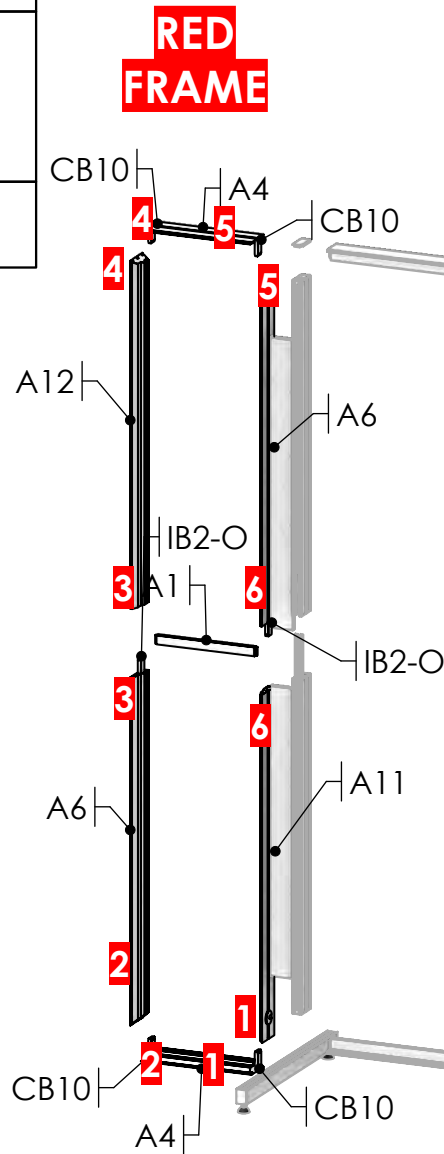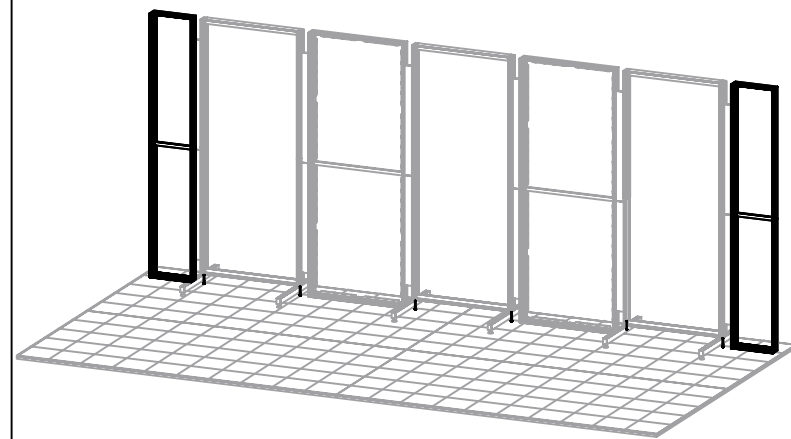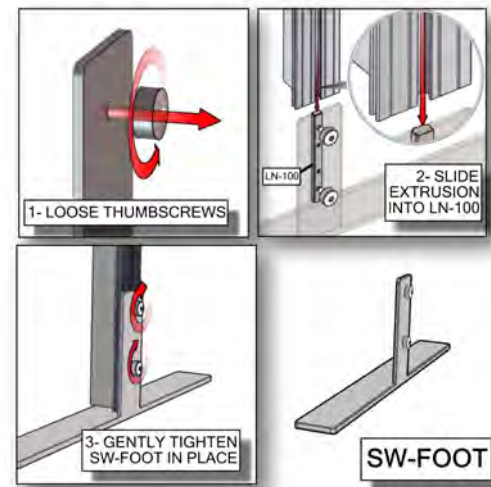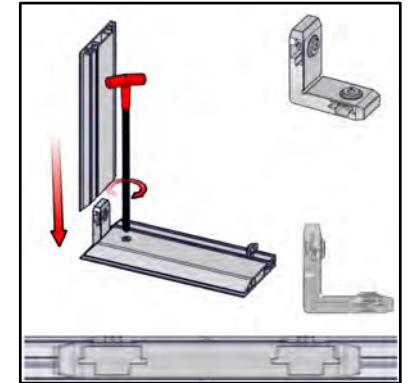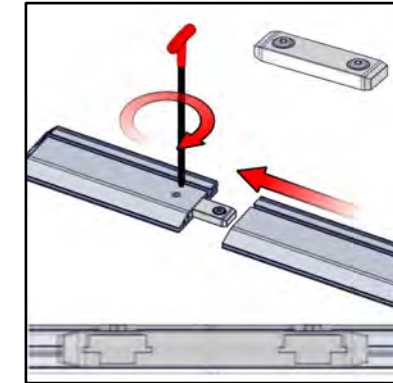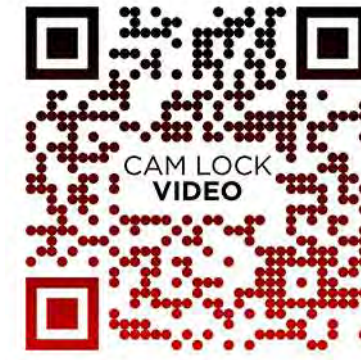


COMPONENTS
IN THIS STEP:
(Not to scale)




| SETUP# | # | DESCRIPTION |
|--------|---|--|
| GR-E | 1 | LINER (E) (39.31 w X 98.37 h total size) 35.31 w X 94.37 h finish size, Opaque Liner, sewn with FCE-2 silicone beading around perimeter & pull tab in bottom right corner |
| GR-H | 1 | LINER (H) (39.31 w X 98.37 h total size) 35.31 w X 94.37 h finish size, Opaque Liner, sewn with FCE-2 silicone beading around perimeter & pull tab in bottom right corner |
| GR-B | 1 | LINER (B) (19.63 w X 98.37 h total size) 15.63 w X 94.37 h finish size, Opaque Liner, sewn with FCE-2 silicone beading around perimeter & pull tab in bottom right corner |
| GR-K | 1 | LINER (K) (19.63 w X 98.37 h total size) 15.63 w X 94.37 h finish size, Opaque Liner, sewn with FCE-2 silicone beading around perimeter & pull tab in bottom right corner |

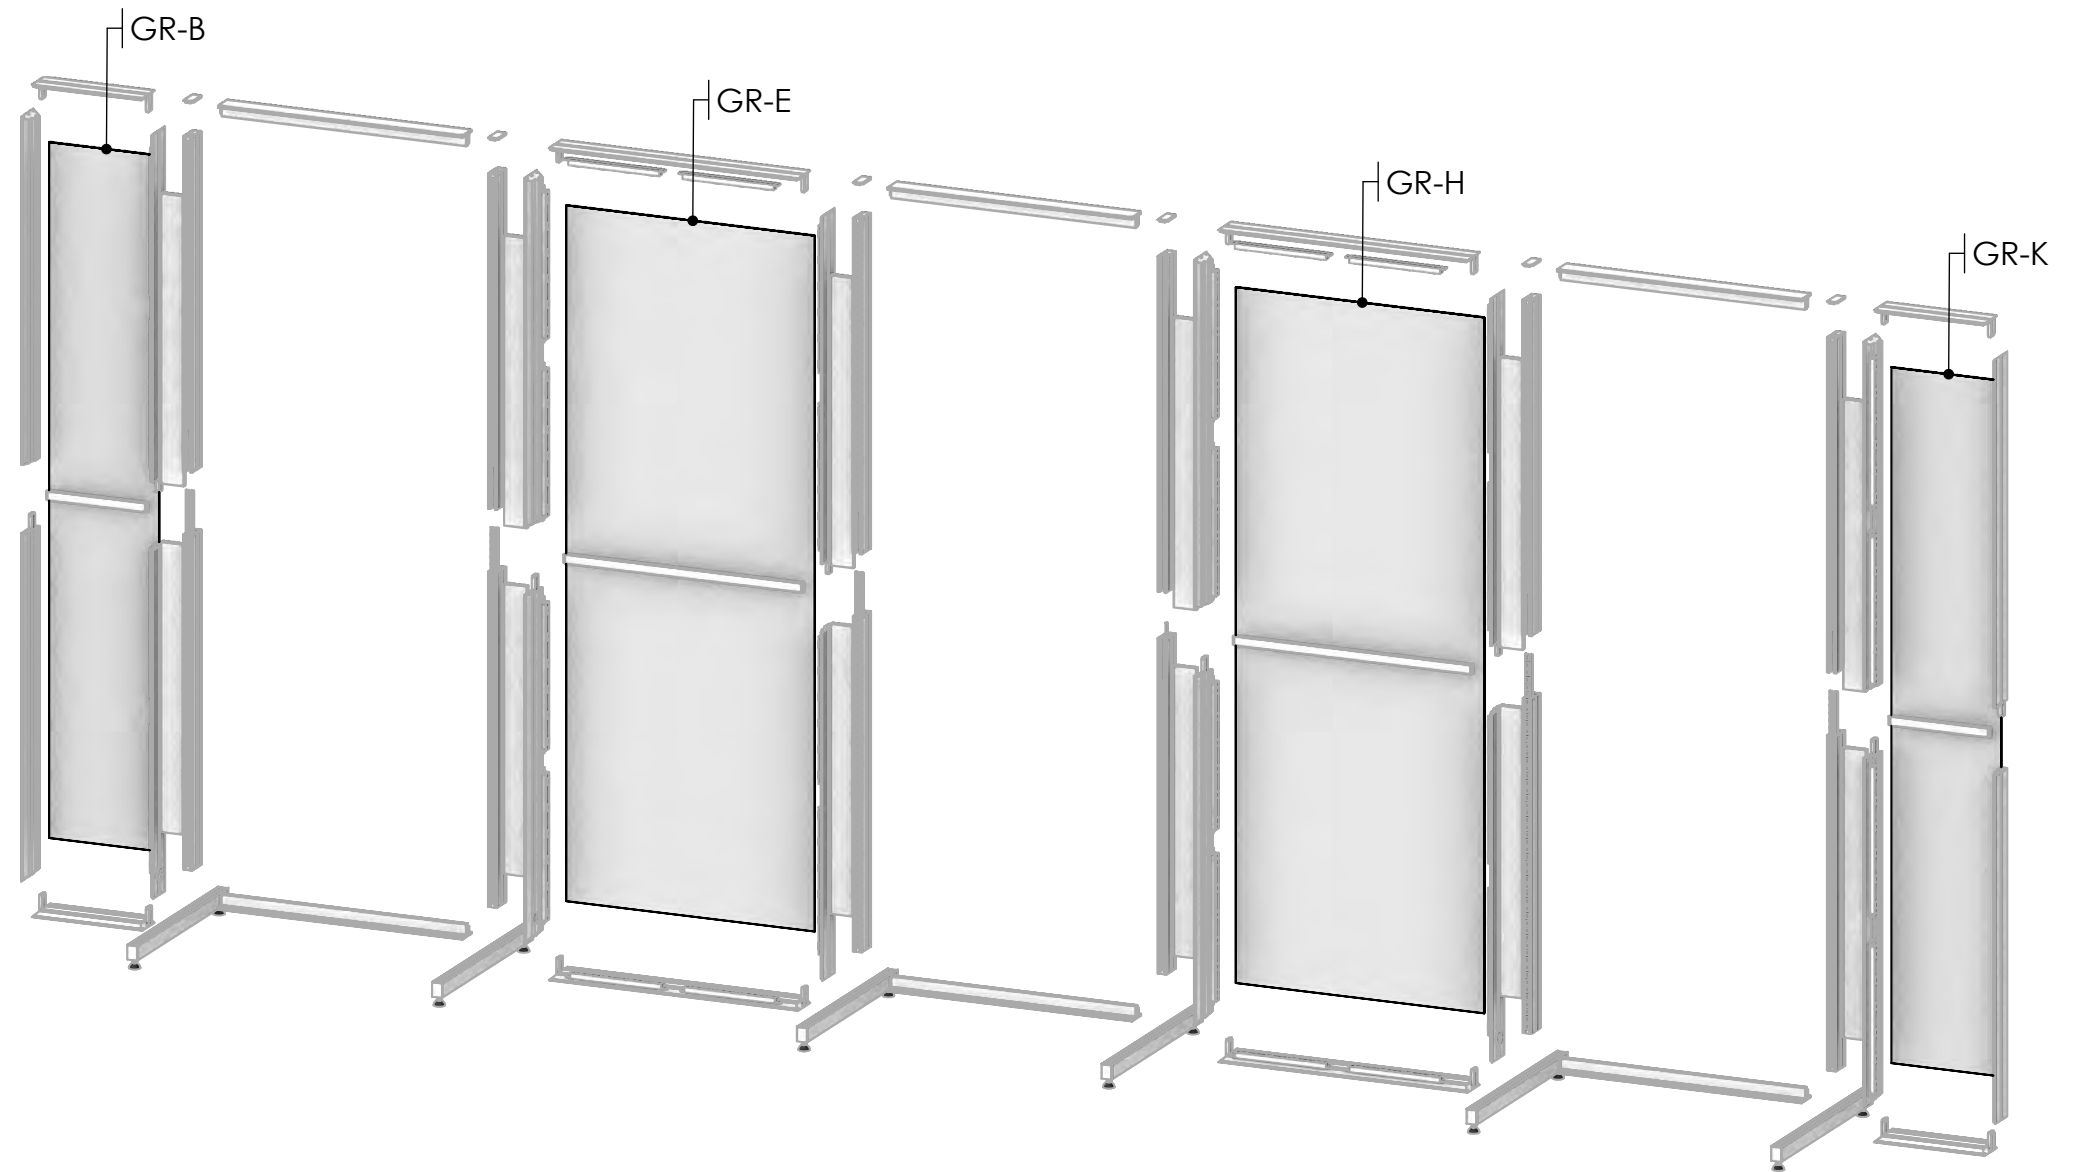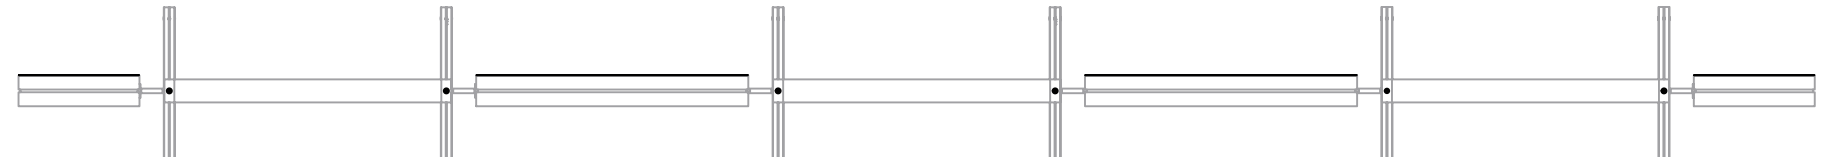


| SETUP# | # | DESCRIPTION |
|--------|---|---|
| GR-F | 1 | GRAPHIC (F) (39.26 w X 95.04 h total size) 35.26 w X 91.04 h finish size, Dye-sub print on Eclipse Blockout Stretch, single sided, sewn with FCE-2 silicone beading around perimeter & pull tab in bottom right corner (WITH 1/4" NOTCH LEFT & RIGHT BOTTOM HORIZONTAL SIDE CORNERS) |
| GR-D | 1 | GRAPHIC (D) (39.31 w X 98.37 h total size) 35.31 w X 94.37 h finish size, Dye-sub print on Backlit Textile, single sided, sewn with silicone beading around perimeter & pull tab in bottom right corner |
| GR-I | 1 | GRAPHIC (I) (39.26 w X 95.04 h total size) 35.26 w X 91.04 h finish size, Dye-sub print on Eclipse Blockout Stretch, single sided, sewn with FCE-2 silicone beading around perimeter & pull tab in bottom right corner (WITH 1/4" NOTCH LEFT & RIGHT BOTTOM HORIZONTAL SIDE CORNERS) |
| GR-C | 1 | GRAPHIC (C) (39.26 w X 95.04 h total size) 35.26 w X 91.04 h finish size, Dye-sub print on Eclipse Blockout Stretch, single sided, sewn with FCE-2 silicone beading around perimeter & pull tab in bottom right corner (WITH 1/4" NOTCH LEFT & RIGHT BOTTOM HORIZONTAL SIDE CORNERS) |
| GR-G | 1 | GRAPHIC (G) (39.31 w X 98.37 h total size) 35.31 w X 94.37 h finish size, Dye-sub print on Backlit Textile, single sided, sewn with silicone beading around perimeter & pull tab in bottom right corner |
| GR-A | 1 | GRAPHIC (A) (19.63 w X 98.37 h total size) 15.63 w X 94.37 h finish size, Dye-sub print on Backlit Textile, single sided, sewn with silicone beading around perimeter & pull tab in bottom right corner |
| GR-J | 1 | GRAPHIC (J) (19.63 w X 98.37 h total size) 15.63 w X 94.37 h finish size, Dye-sub print on Backlit Textile, single sided, sewn with silicone beading around perimeter & pull tab in bottom right corner |

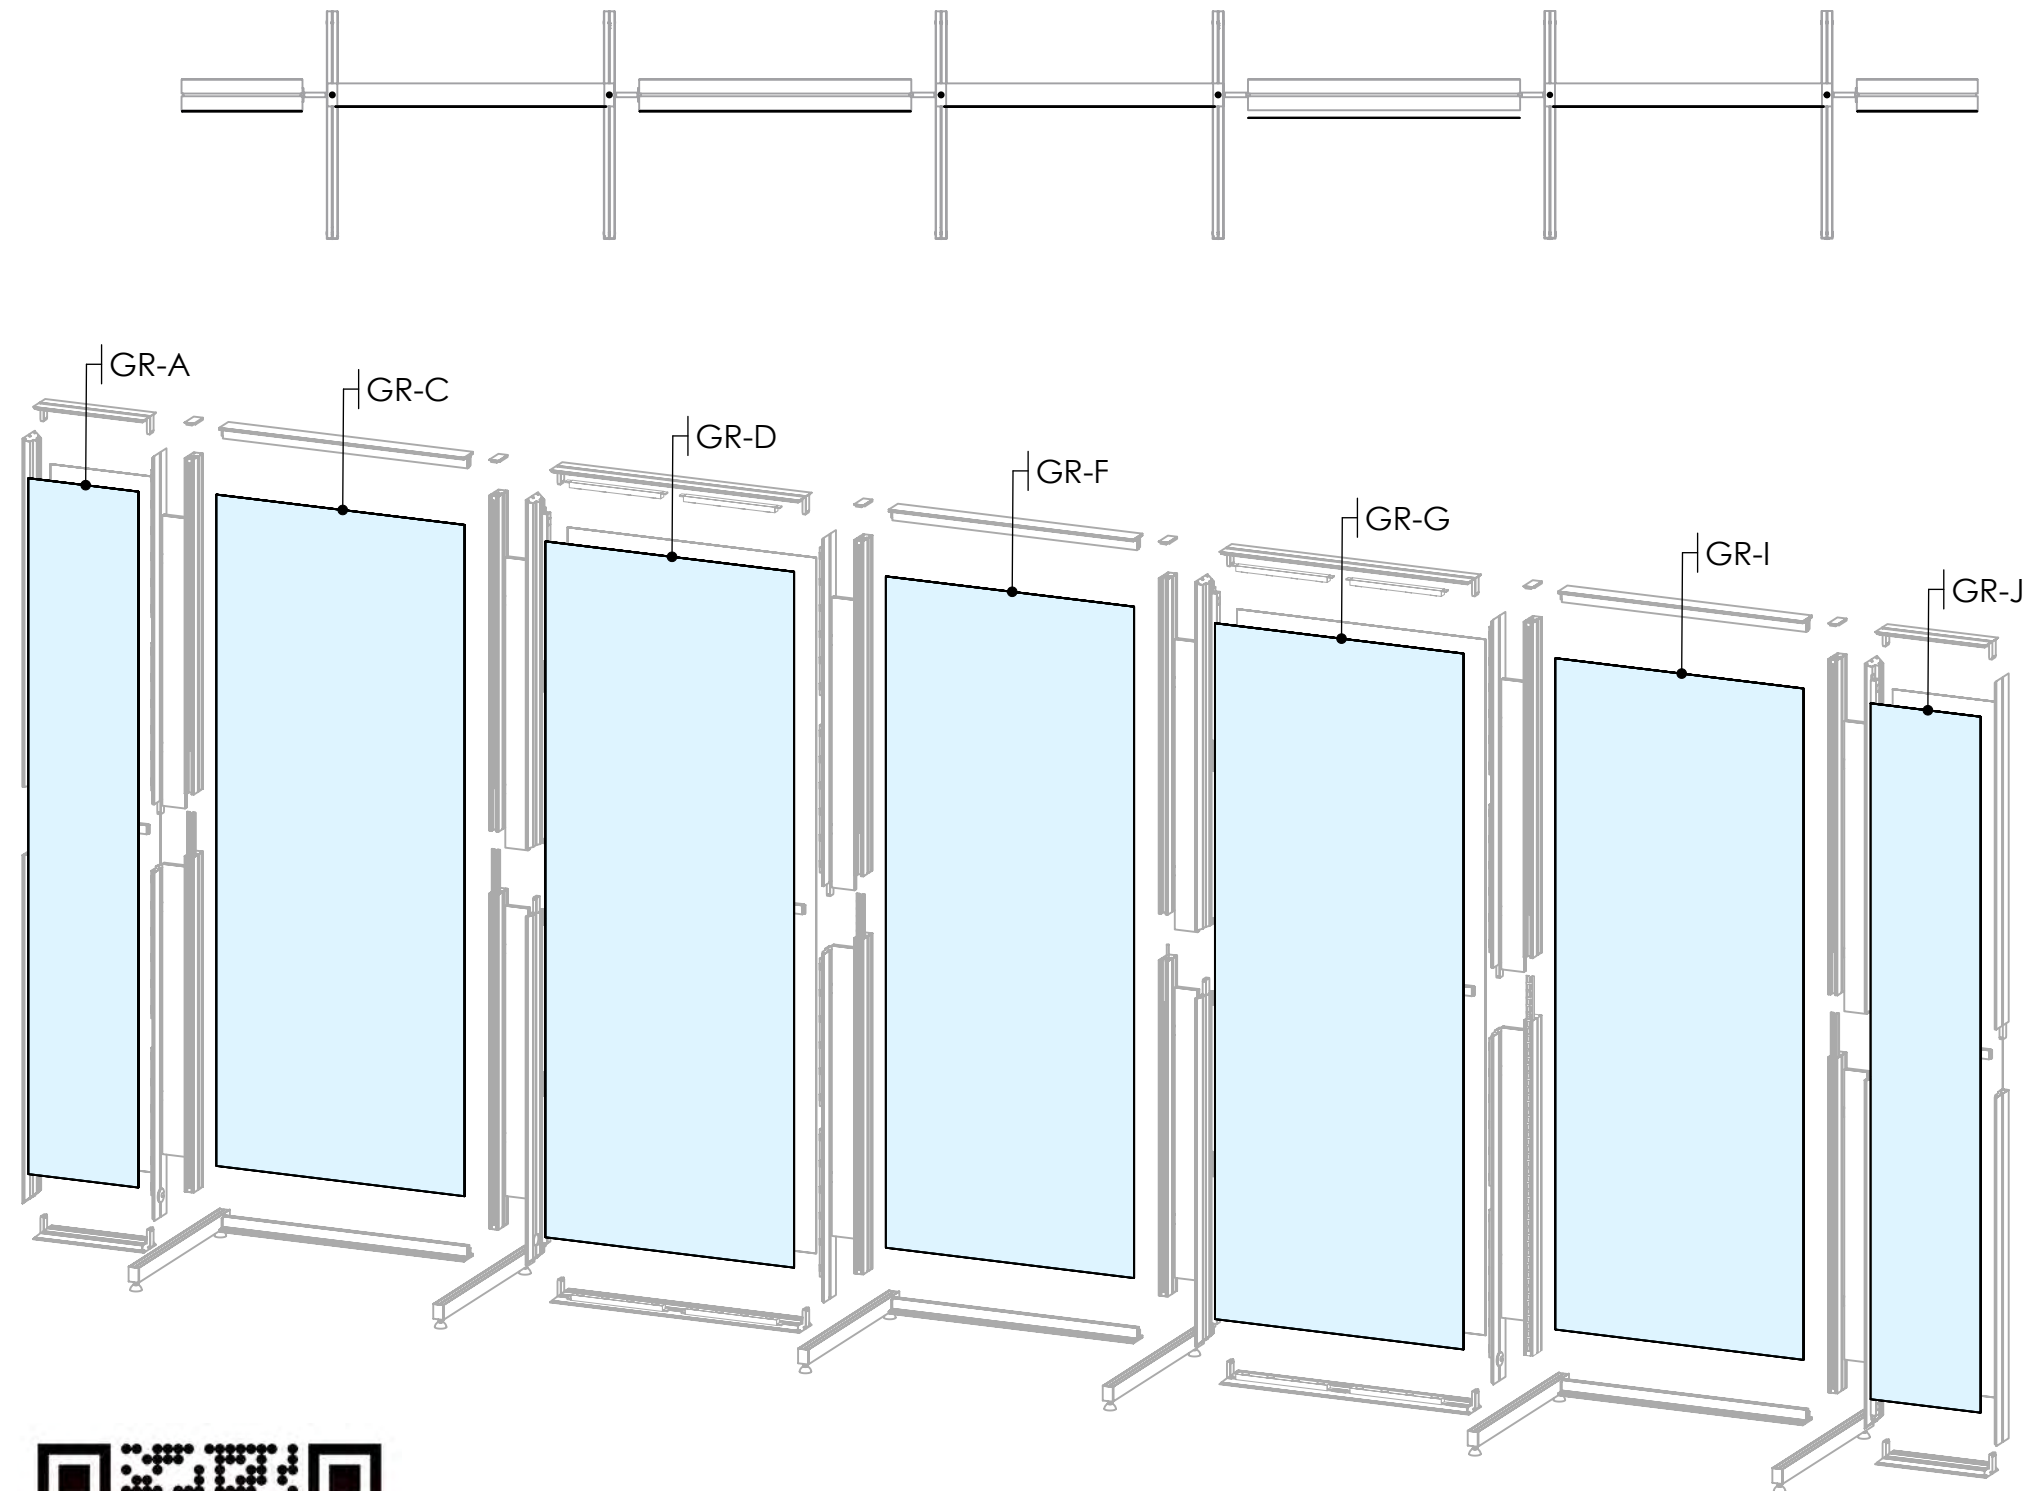

| SETUP# | # | DESCRIPTION |
|------------|---|---|
| MFY-DB-36 | 3 | 36"W X 17"D DROP IN BASE WITH 2" TOE KICK |
| MFY-SLF-36 | 6 | 36"W X 12"D SHELF |

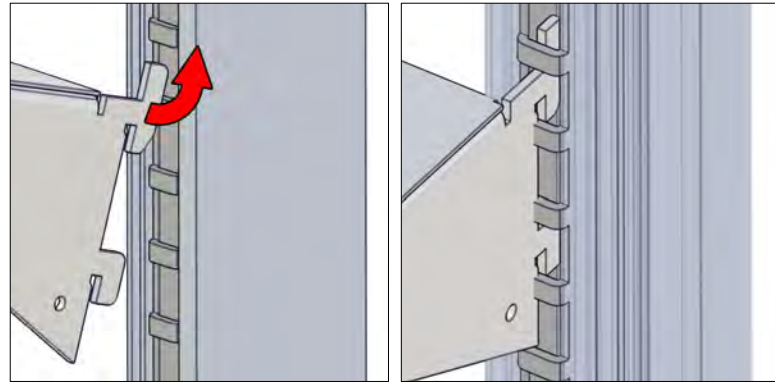

RAISE AND HOOK SHELF INTO PLACE
 **START WITH BOTTOM SHELVES.

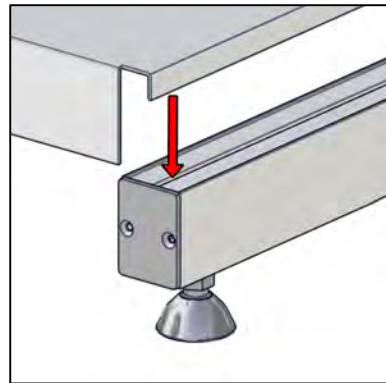

MFY-36-17-BASE-PAN
 PLACE BASE PAN
 IN GROOVE(FOOT)

